
Product Catalogue SUPREMACY SERIES

HIGH GLOSS



600x1200mm

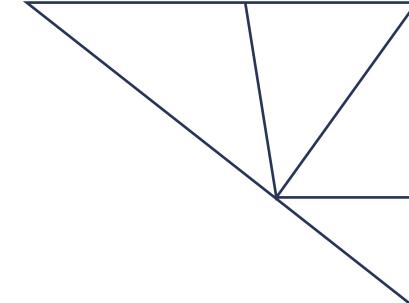

600x1200mm Thickness: 9mm







ALASKA WHITE

Polished Glazed Vitrified Tiles



SUPREMACY

(














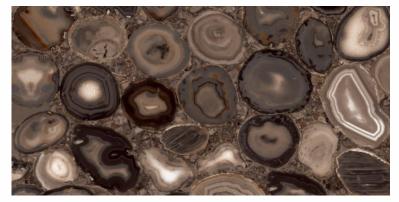


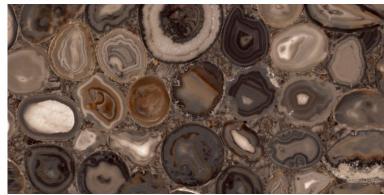

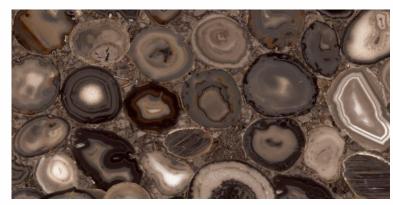


ALDO BROWN

Polished Glazed Vitrified Tiles

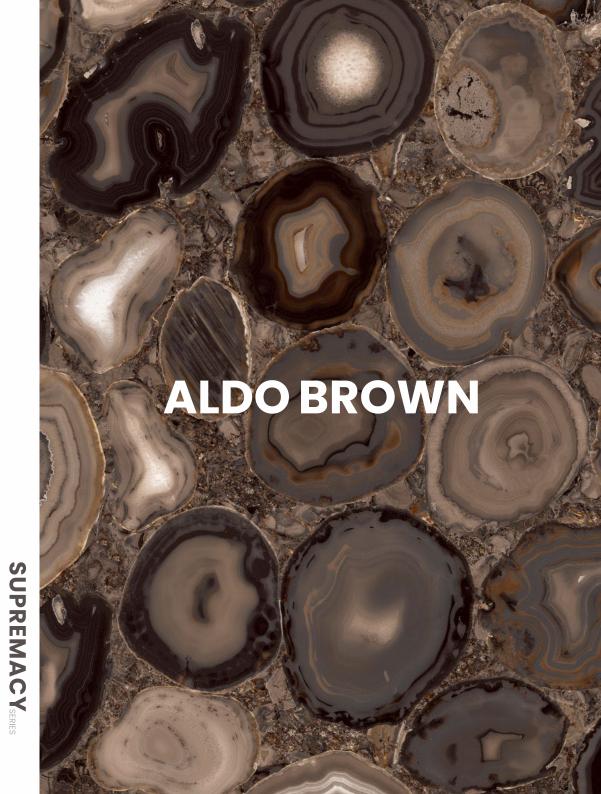




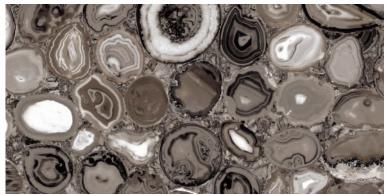



ALDO FROST

Polished Glazed Vitrified Tiles

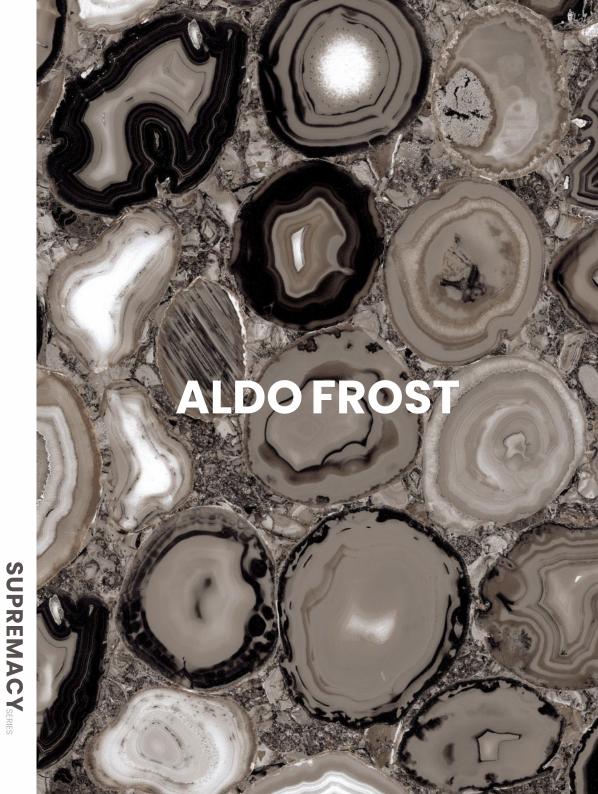

600x1200mm Thickness: 9mm








ARIZONA STONE

Polished Glazed Vitrified Tiles

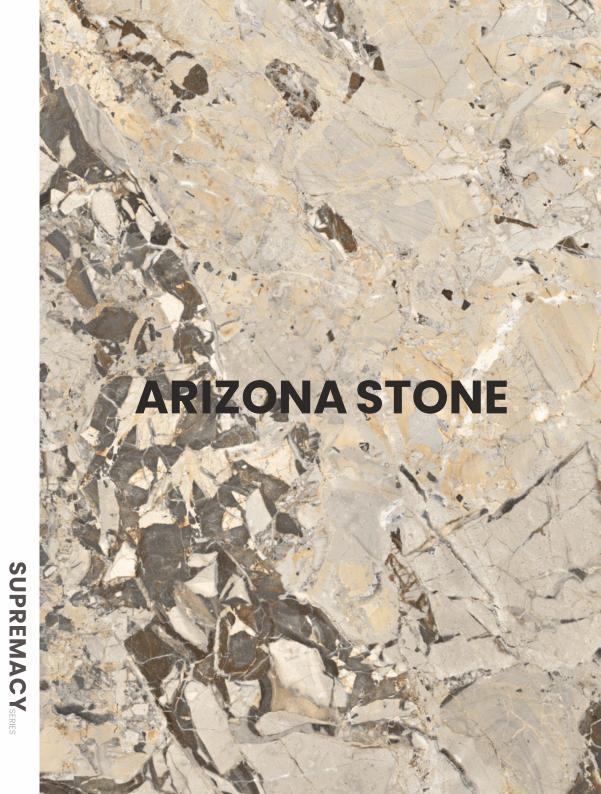







ARMOUR ONYX-BEIGE

Polished Glazed Vitrified Tiles









ARMOUR ONYX-BLUE

Polished Glazed Vitrified Tiles









ARMOUR ONYX ROYAL

Polished Glazed Vitrified Tiles




SUPREMACY



ATOLINI BROWN


Polished Glazed Vitrified Tiles

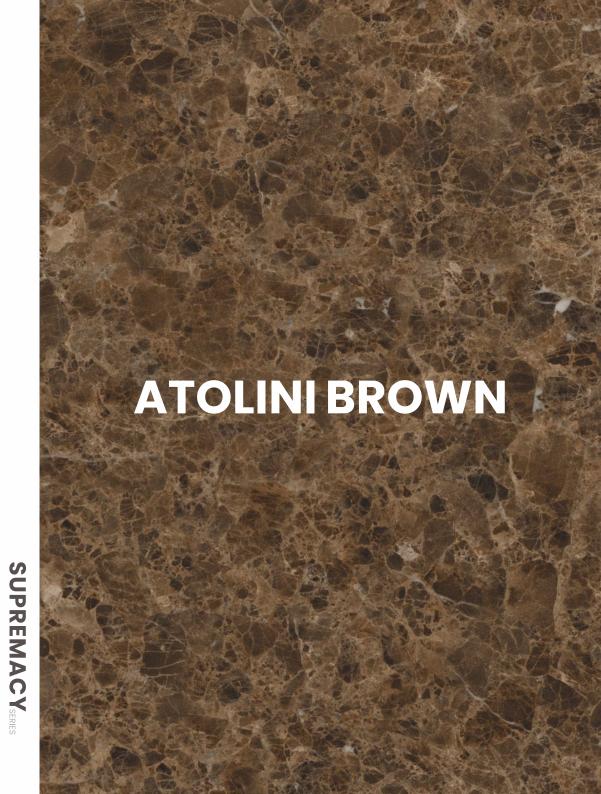




ATOLINI COFFEE

Polished Glazed Vitrified Tiles

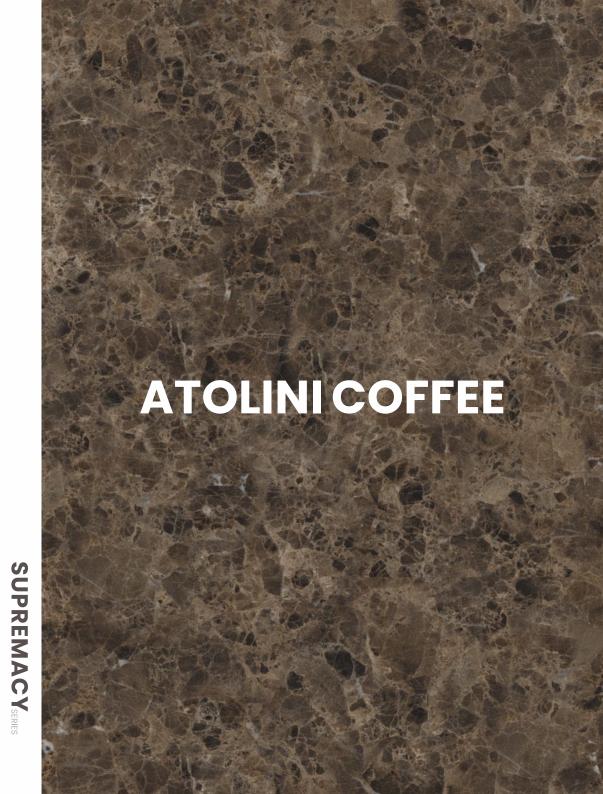

600x1200mm Thickness: 9mm

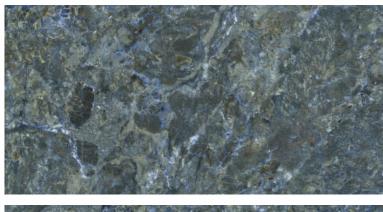







BERYL NATURAL

Polished Glazed Vitrified Tiles

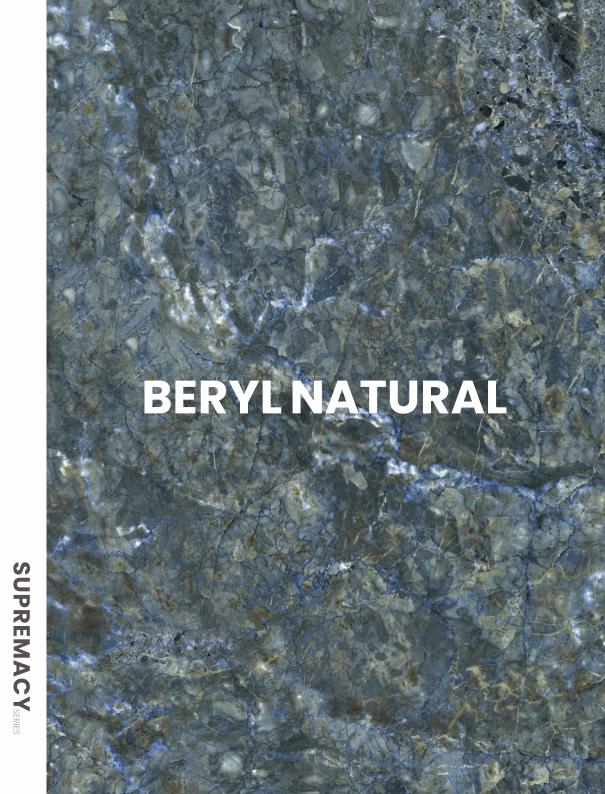

600x1200mm Thickness: 9mm

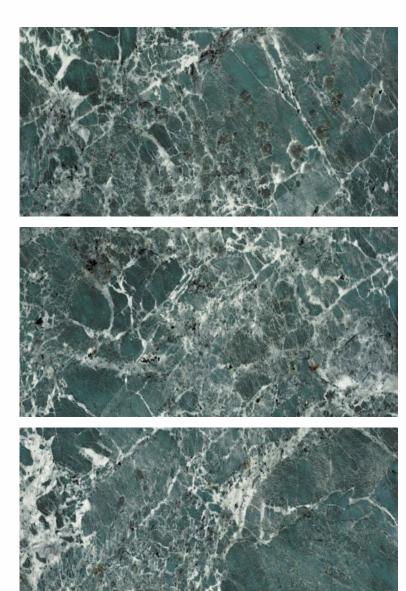

BORA BORA BLUE

Polished Glazed Vitrified Tiles



SUPREMACYSERIES









CONTUSE BLUE

Polished Glazed Vitrified Tiles



600x1200mm Thickness: 9mm

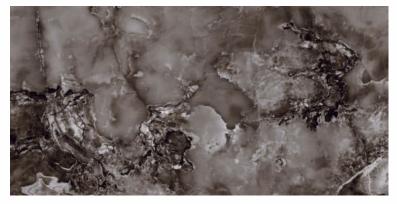

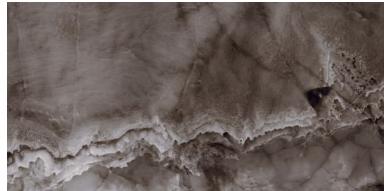



CONTUSE COCOA

Polished Glazed Vitrified Tiles



600x1200mm Thickness: 9mm







CONTUSE GOLD

Polished Glazed Vitrified Tiles



600x1200mm Thickness: 9mm







CONTUSE GREY

Polished Glazed Vitrified Tiles



SUPREMACY








CRAG GREY

Polished Glazed Vitrified Tiles

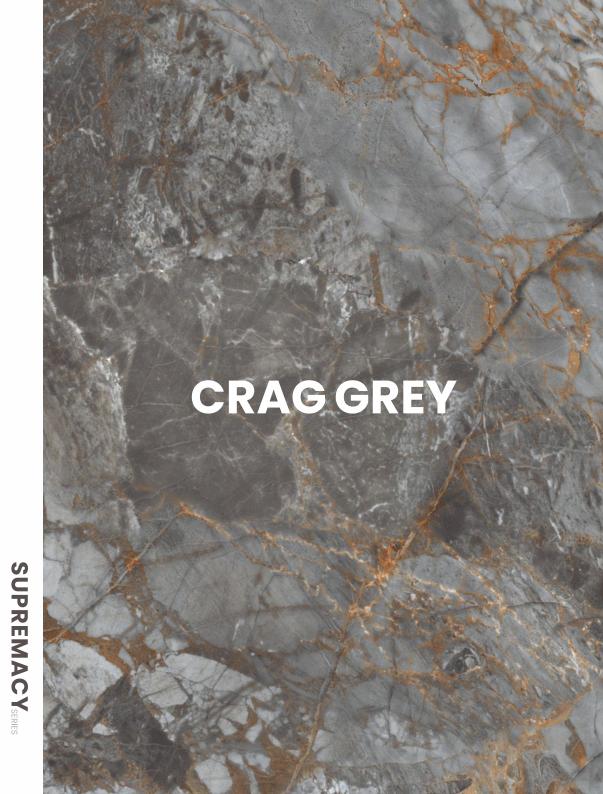








DERBY DESERT

Polished Glazed Vitrified Tiles

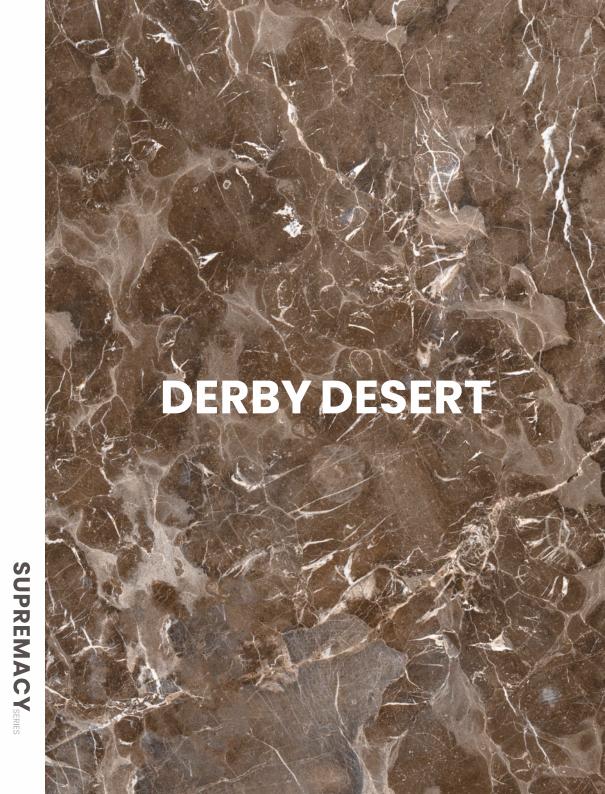











600x1200mm Thickness: 9mm








DERBY FLOSS

Polished Glazed Vitrified Tiles

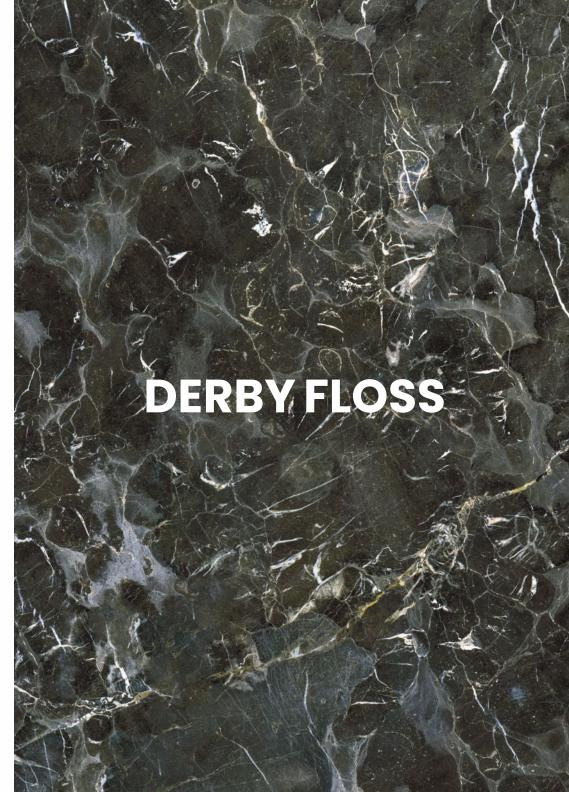

SUPREMACYSERIES

600x1200mm Thickness: 9mm








DUSTY BROWN

Polished Glazed Vitrified Tiles

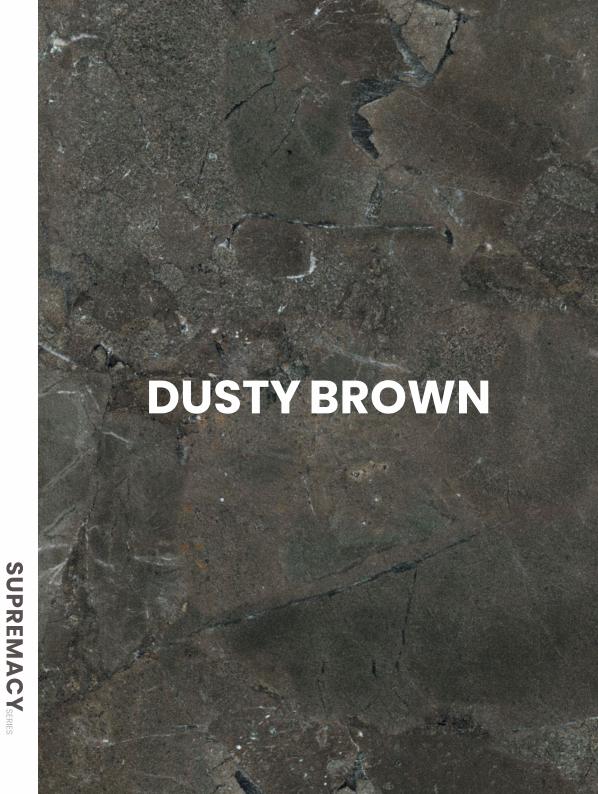

600x1200mm Thickness: 9mm









DUSTY DARK

Polished Glazed Vitrified Tiles

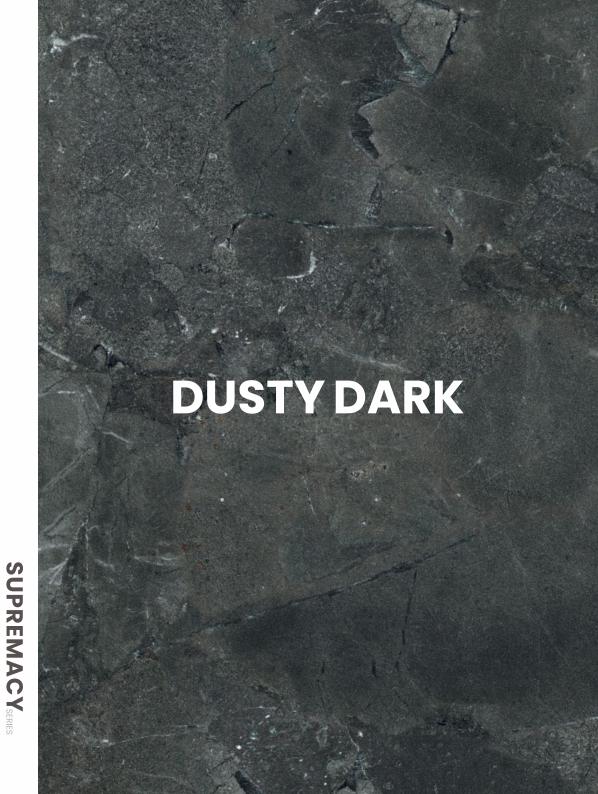




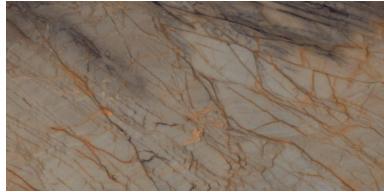



GLISTER BRONZE

Polished Glazed Vitrified Tiles

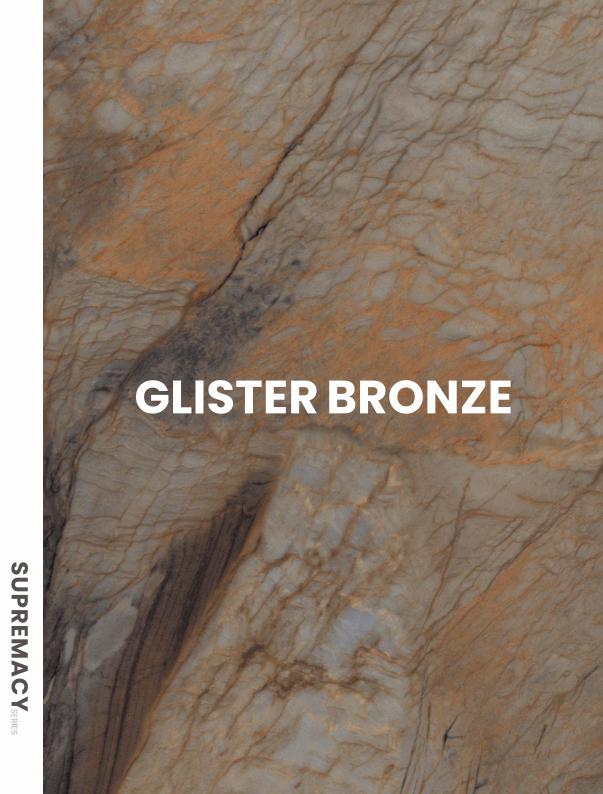








GLISTER SILVER

Polished Glazed Vitrified Tiles

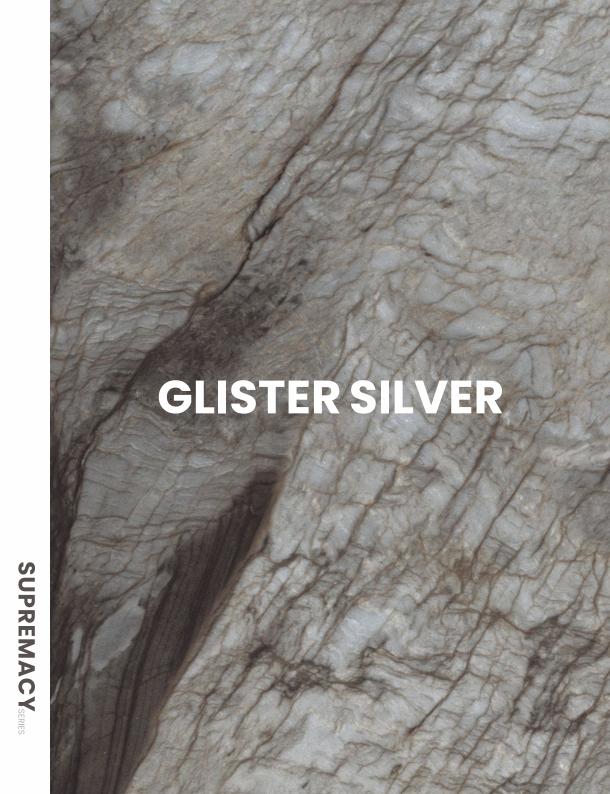








JETTY BROWN

Polished Glazed Vitrified Tiles

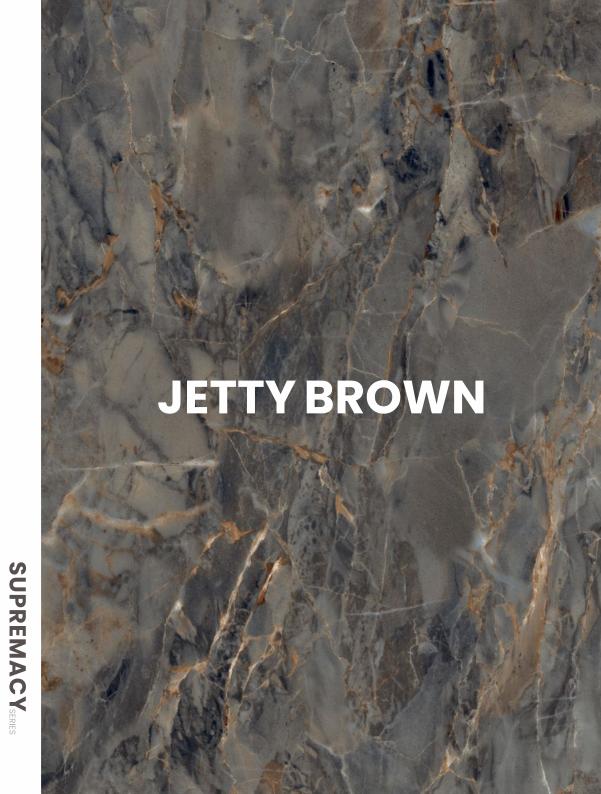

600x1200mm Thickness: 9mm








LARK SILVER

Polished Glazed Vitrified Tiles

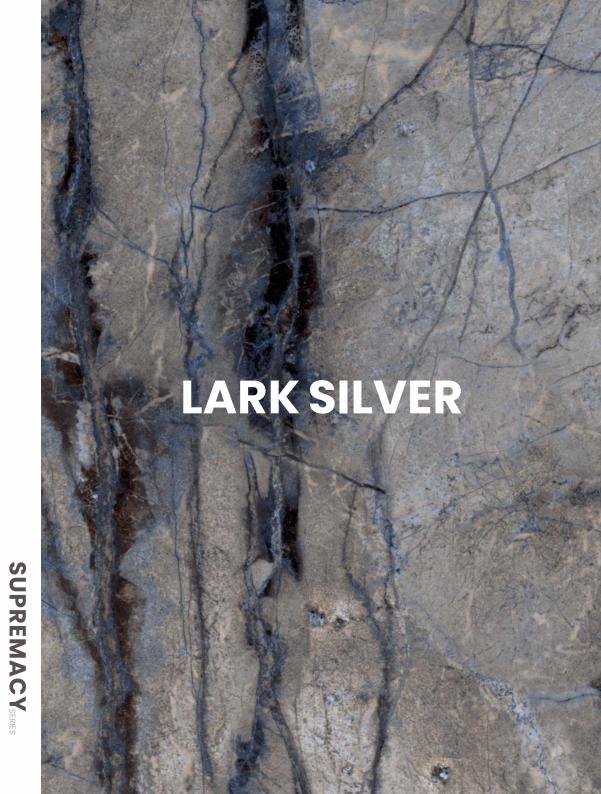




LARK WHITE

Polished Glazed Vitrified Tiles




SUPREMACYSERIES

600x1200mm Thickness: 9mm

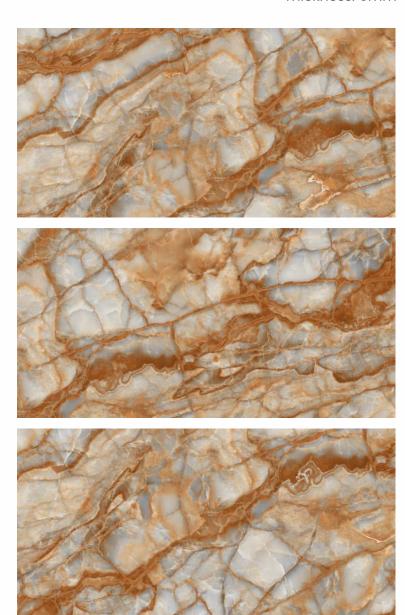



LIVID GOLD

Polished Glazed Vitrified Tiles

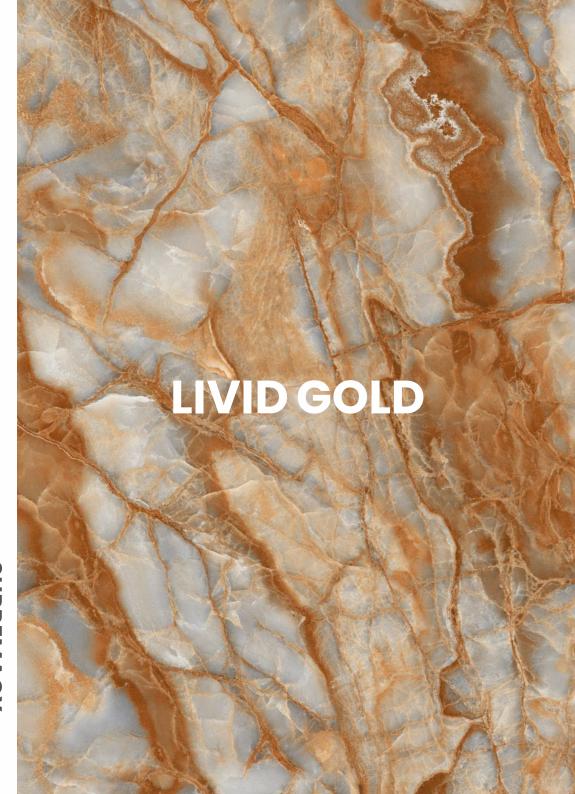

SUPREMACYSERIES

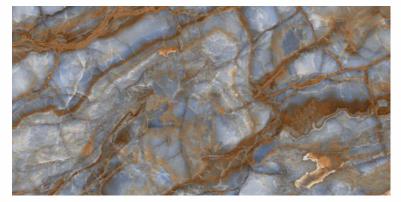


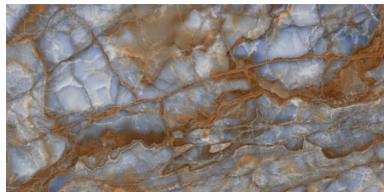



LIVID NATURAL

Polished Glazed Vitrified Tiles

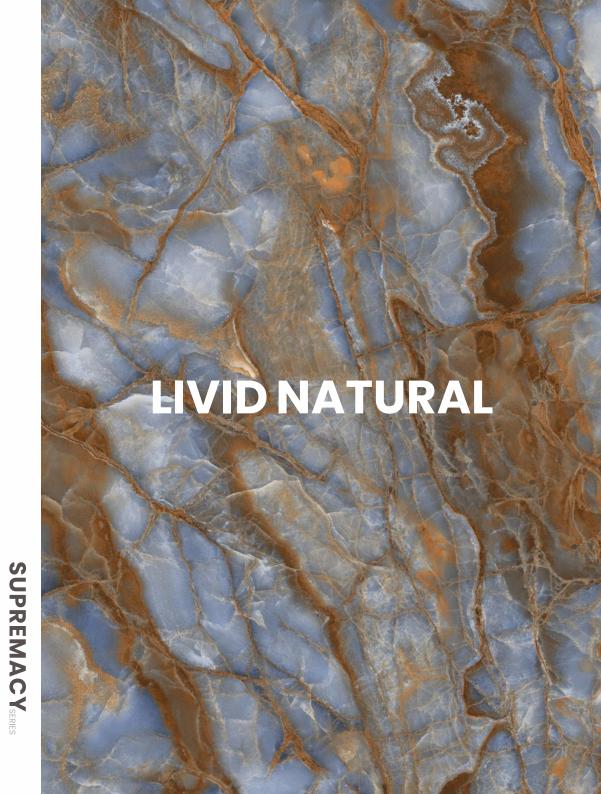








MARVIS AMBER

Polished Glazed Vitrified Tiles

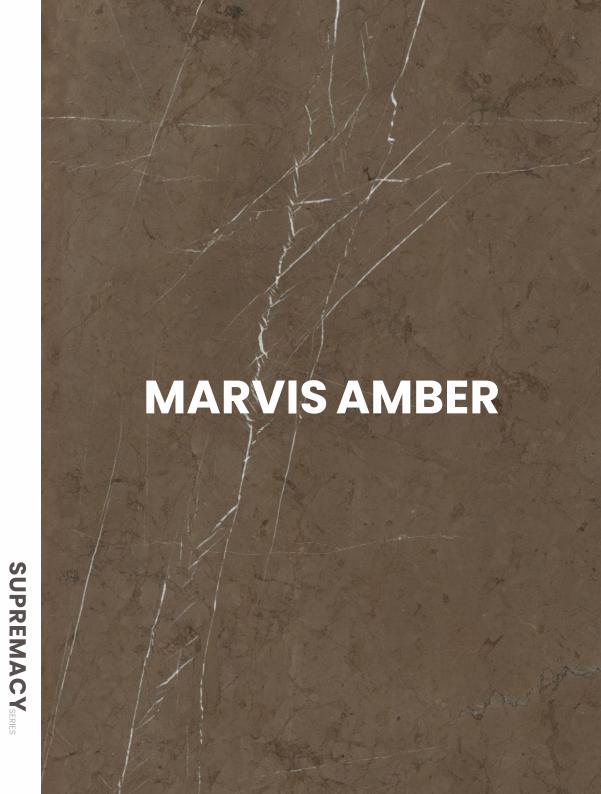








MARVIS SOMBER

Polished Glazed Vitrified Tiles

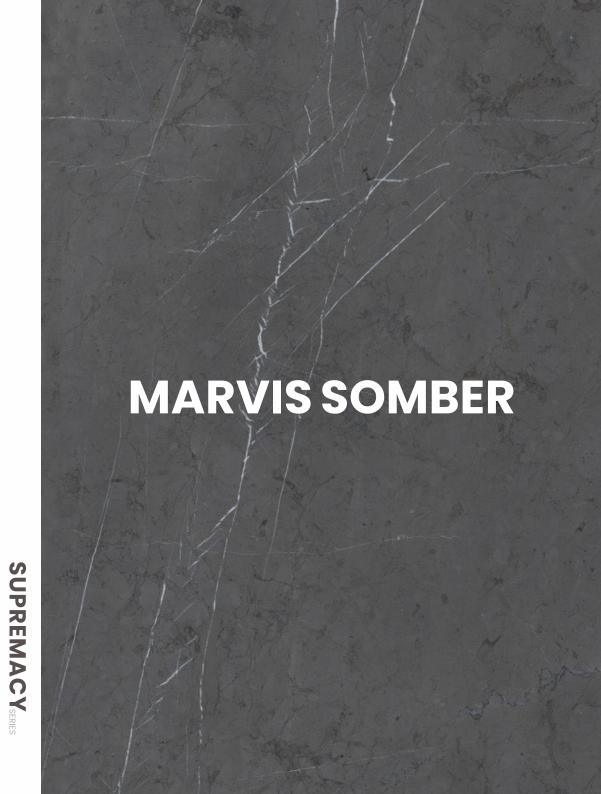








NAUTILUS BEACH

Polished Glazed Vitrified Tiles

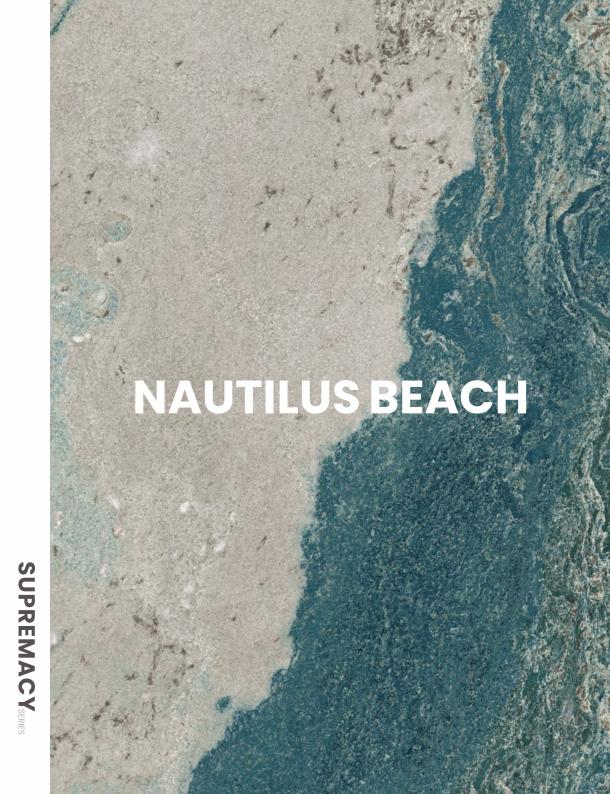









PESTA MONK

Polished Glazed Vitrified Tiles

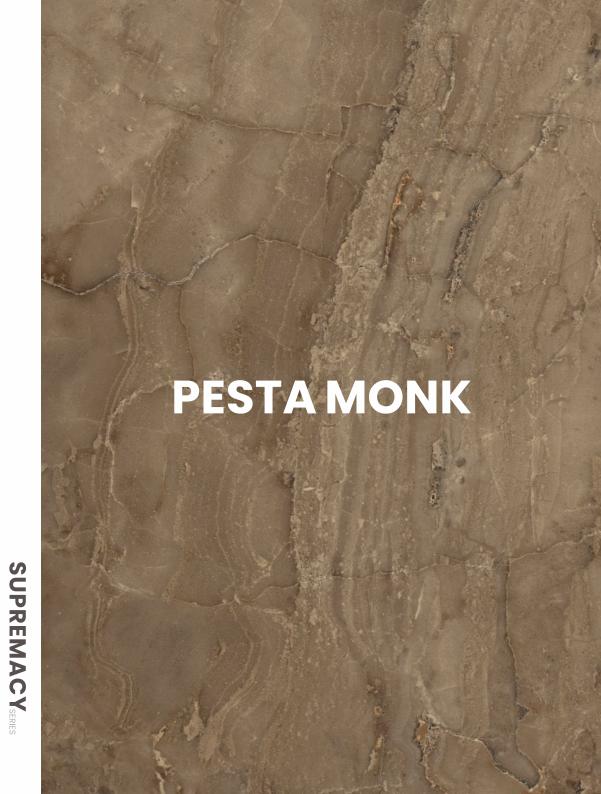

600x1200mm Thickness: 9mm




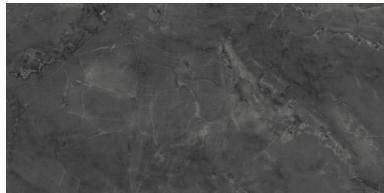



PESTA ZEN

Polished Glazed Vitrified Tiles

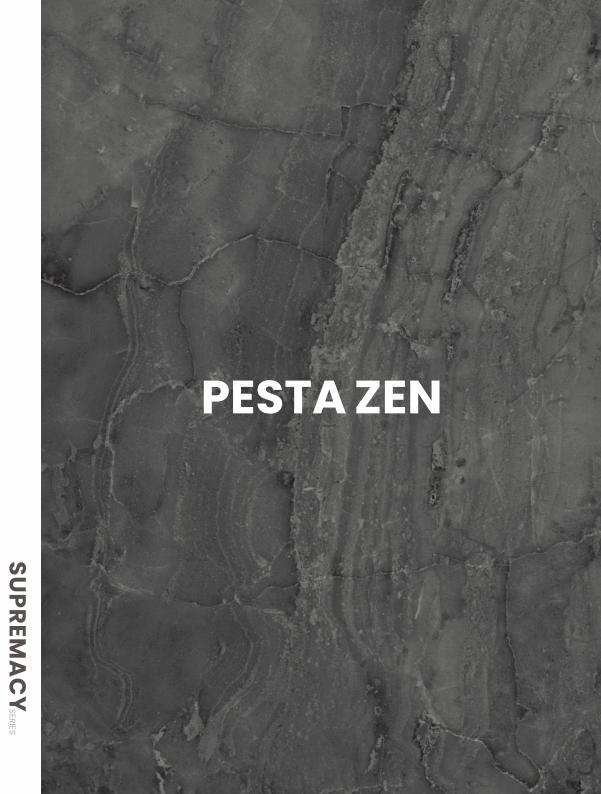

600x1200mm Thickness: 9mm








ROSS SILVER

Polished Glazed Vitrified Tiles

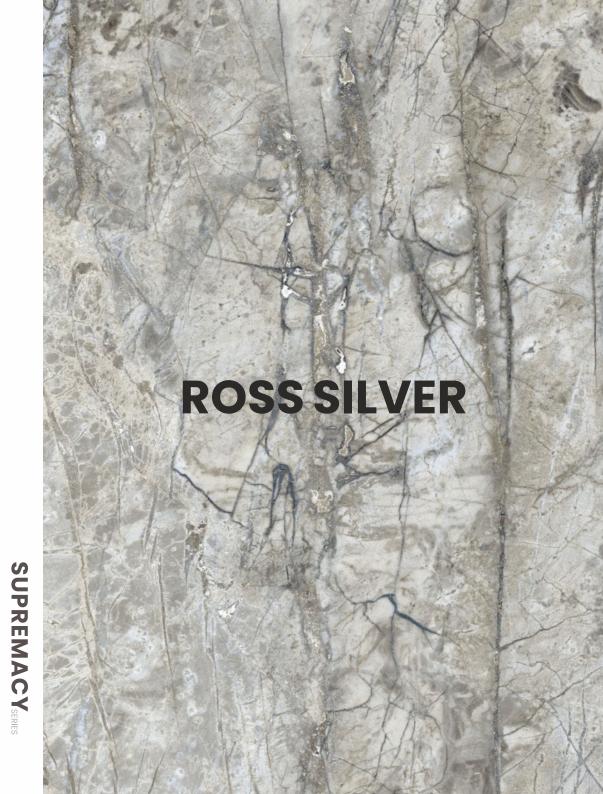

600x1200mm Thickness: 9mm








ROSS SUNSET

Polished Glazed Vitrified Tiles

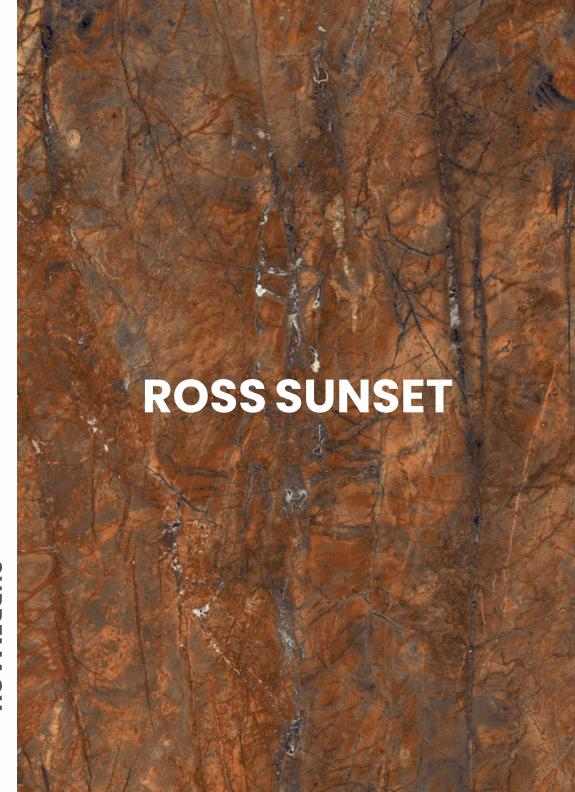

SUPREMACYSERIES








SIDON WHITE

Polished Glazed Vitrified Tiles

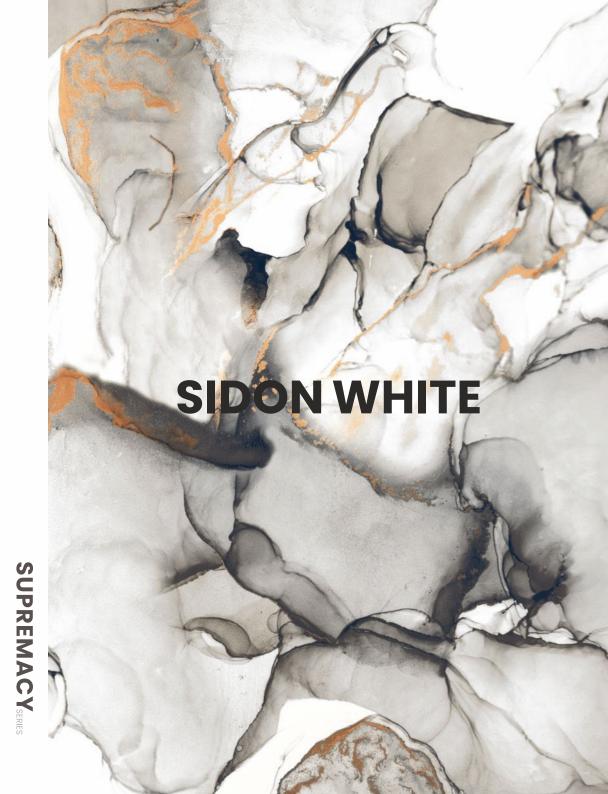







SPLASH BLUUE

Polished Glazed Vitrified Tiles












SPLASH LIME

Polished Glazed Vitrified Tiles

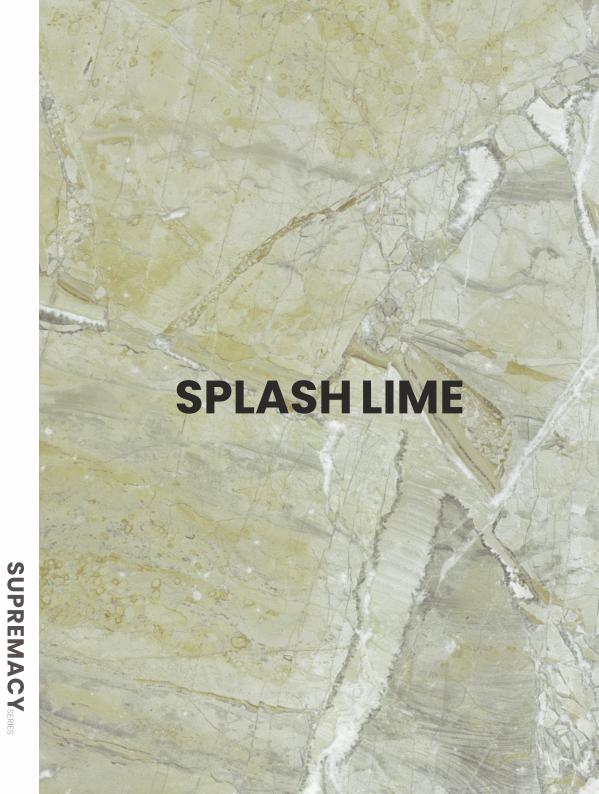

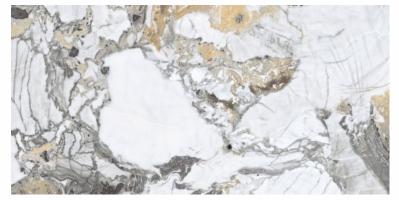




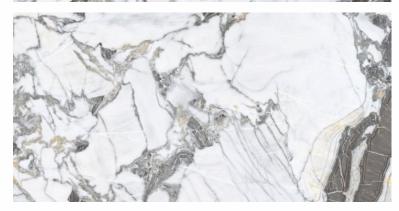

VENINZULA BRIGHT

Polished Glazed Vitrified Tiles

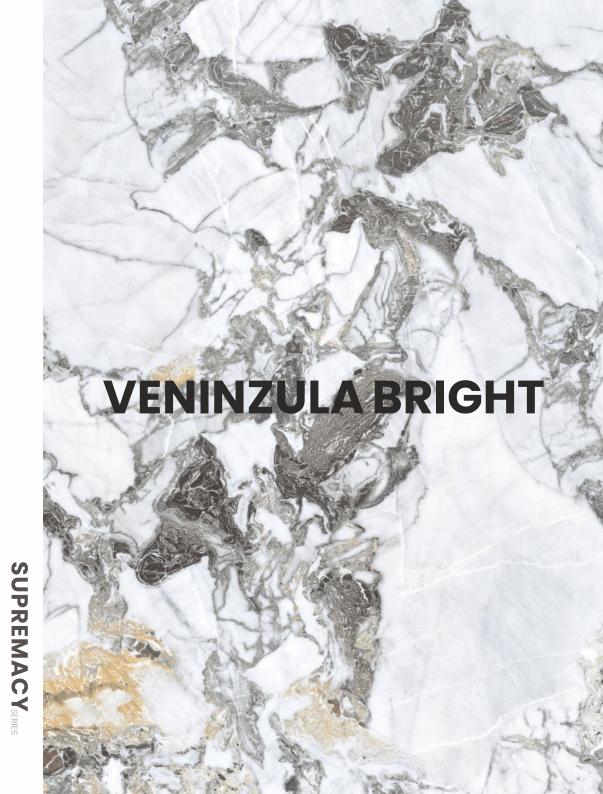

GVT/ PGVT SPECIFICATIONS

Test Description	Test Method	ISO 13006:2018 / EN 14411 Group Bla Requirement	Indian Standard IS 15622:2017 Group B1a Requirement	Value (Polished)	Value (Matt)
Length & Width	ISO 10545-2 / IS 13630-1	± 0.3% or ±1.0mm	± 0.1 %	± 0.1%	± 0.1%
Thicness	ISO 10545-2 / IS 13630-1	± 5% or ± 0.5mm	± 5 %	± 4%	± 4%
Straightness of Sides	ISO 10545-2 / IS 13630-1	± 0.3% or ±0.8mm	± 0.1 %	± 0.1%	± 0.1%
Retangularity	ISO 10545-2 / IS 13630-1	± 0.3% or ± 1.5mm	± 0.1 %	± 0.1 %	± 0.1 %
Surface Flatness	ISO 10545-2 / IS 13630-1	± 0.4% or ±1.8mm	± 0.5 %	± 0.15%	± 0.15%
Surface Quality	ISO 10545-2 / IS 13630-1	Min 95% free from visible defects	Min 95% free from visible defects	>95% free from visible defects	>95% free from visible defects
Water Absorption	ISO 10545-3/ IS 13630- 2	≤ 0.5% , individual Max 0.6% .	Avaerage ≤0.08%, Individual 0.1%, Max	≤ 0.05%	≤ 0.05%
Breaking Strength	ISO 10545-4 / IS 13630-6	700 N Min for thickness < 7.5 mm, 1300 Min for thickness ≥ 7.5 mm	700 N Min for thickness < 7.5 mm, 1300 Min for thickness ≥ 7.5 mm	≥ 1500 N	≥ 1500 N
Moisture Expansion	ISO 10545-10 / IS 13630-3	report value	0.02 mm/ m, Max	≤ 0.02 mm/ m	≤ 0.02 mm/ m
Modulus of Repture	ISO 10545-4/ IS 13630-6	≥ 35 N/mm², Individual 32 N/mm², Min	Average 35 N/mm², Individual 32 N/mm², Min	≥ 38 N/mm2	≥ 38 N/mm2
Resistance to Surface Abrasion	ISO 10545-7 / IS 13630 -11	report abrasion class & Cycle passec	Class II , Min	PEI II - III	PEI III-V
Linear Thermal Expantion	ISO 10545-8/ IS 13630-4	report value	Max, 6x10 ⁻⁶ K ⁻¹	≤ 6x10 ⁻⁶ K ⁻¹	≤ 6x10 ⁻⁶ K ⁻¹
Thermal Stock Resistance	ISO 10545-9 / IS 13630 -5	report result	10 cycles Min	No Damage	No Damage
Frost Resistance	ISO 10545-12 / IS 13630-10	report result	required if requested by purchaser	No Damage	No Damage
Resistance to Chemicals	ISO 10545-13 / IS 13630-8	GB	AA min	GA/AA	GA/AA
Resistance to Stains	ISO 10545-14 / IS 13630-8	Min Class 3	Class I, Min	Class3(ISO) / Class1(BIS)	Class3(ISO) / Class1(BIS)
Color Resistance	ISO 10545-16	Report result	-	No change in color	No change in color
Color Resistance to UV Light	DIN 51094	Report result	-	No change in color	No change in color
Scratch Hardness (MOH's Scale)	IS 13630 -13	Not Required	5, Min	≥ 5	≥6

PACKING DETAILS

DIMENSION	PIECES	COVERAGE
600 X 1200 MM	2	1.44 sq. mtr.

DISCLAIMER: We tiles reserve the right to deleted and amend either totally or partially, any of the colors, shape, sizes, references and other technical specification contained in this catalogue at anytime. The colors shown of tiles in this catalogue are purely illustrative and limited to printing process. Please refer actual sample before final selection. The details of sizes, colors, references should be verified for typographical errors.