


**600x
1200mm**

Product Catalogue

WOODEN MATT



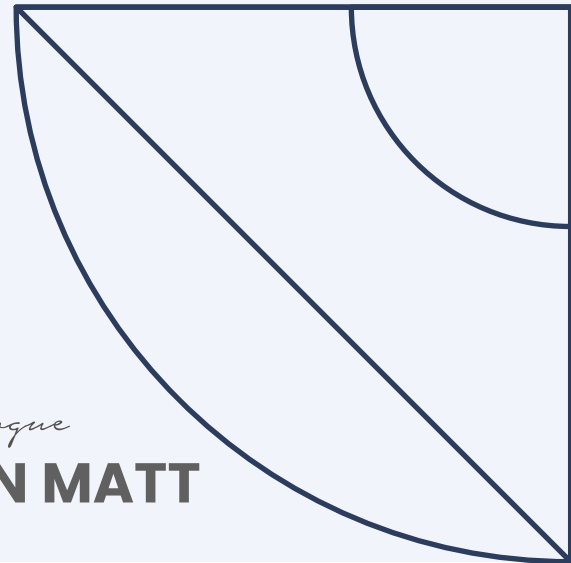

COMPILATION OF WOODEN MATT SURFACES

600x1200mm
Thickness: 9mm



**ANTIQUÉ WHITE
WOOD**

Glazed
Vitrified Tiles

**ANTIQUÉ WHITE
WOOD**





RANDOM DESIGN



ECO FRIENDLY




HIGH STRENGTH



LOW MAINTENANCE

600x1200mm
Thickness: 9mm

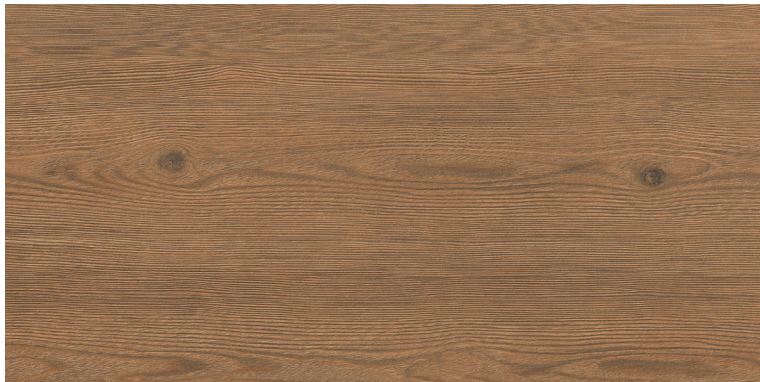


CEDAR COFFEE

Glazed
Vitrified Tiles

CEDAR COFFEE



600x1200mm
Thickness: 9mm

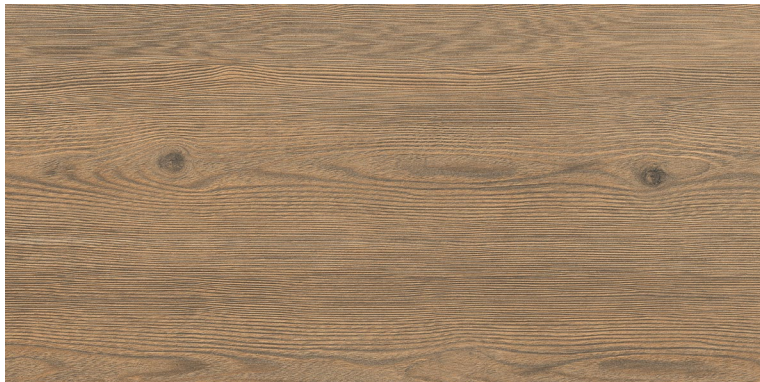

CEDAR SEPIA

Glazed
Vitrified Tiles

CEDAR SEPIA



600x1200mm
Thickness: 9mm



CEDAR VANILLA

Glazed
Vitrified Tiles

CEDAR VANILLA




600x1200mm
Thickness: 9mm



DALI BROWN

Glazed
Vitrified Tiles

DALI BROWN

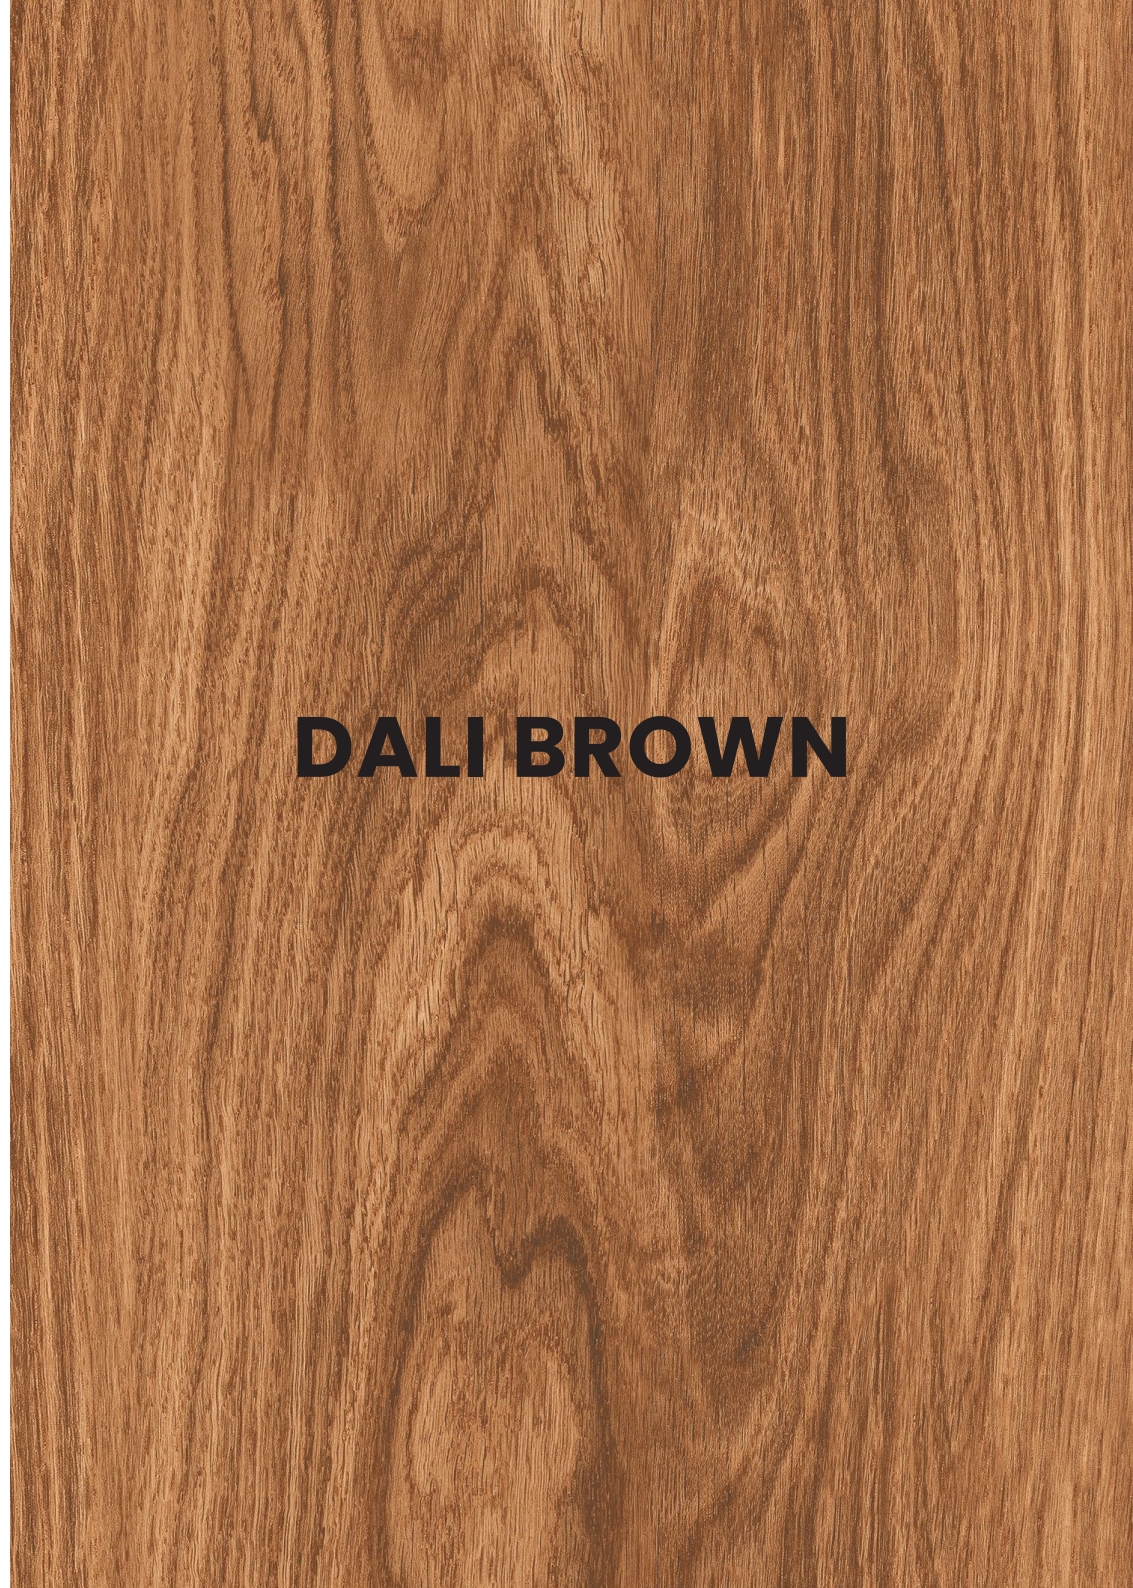



LOW MAINTENANCE



HIGH STRENGTH



ECO FRIENDLY



RANDOM DESIGN




600x1200mm
Thickness: 9mm



DALI GREY

Glazed
Vitrified Tiles

DALI GREY

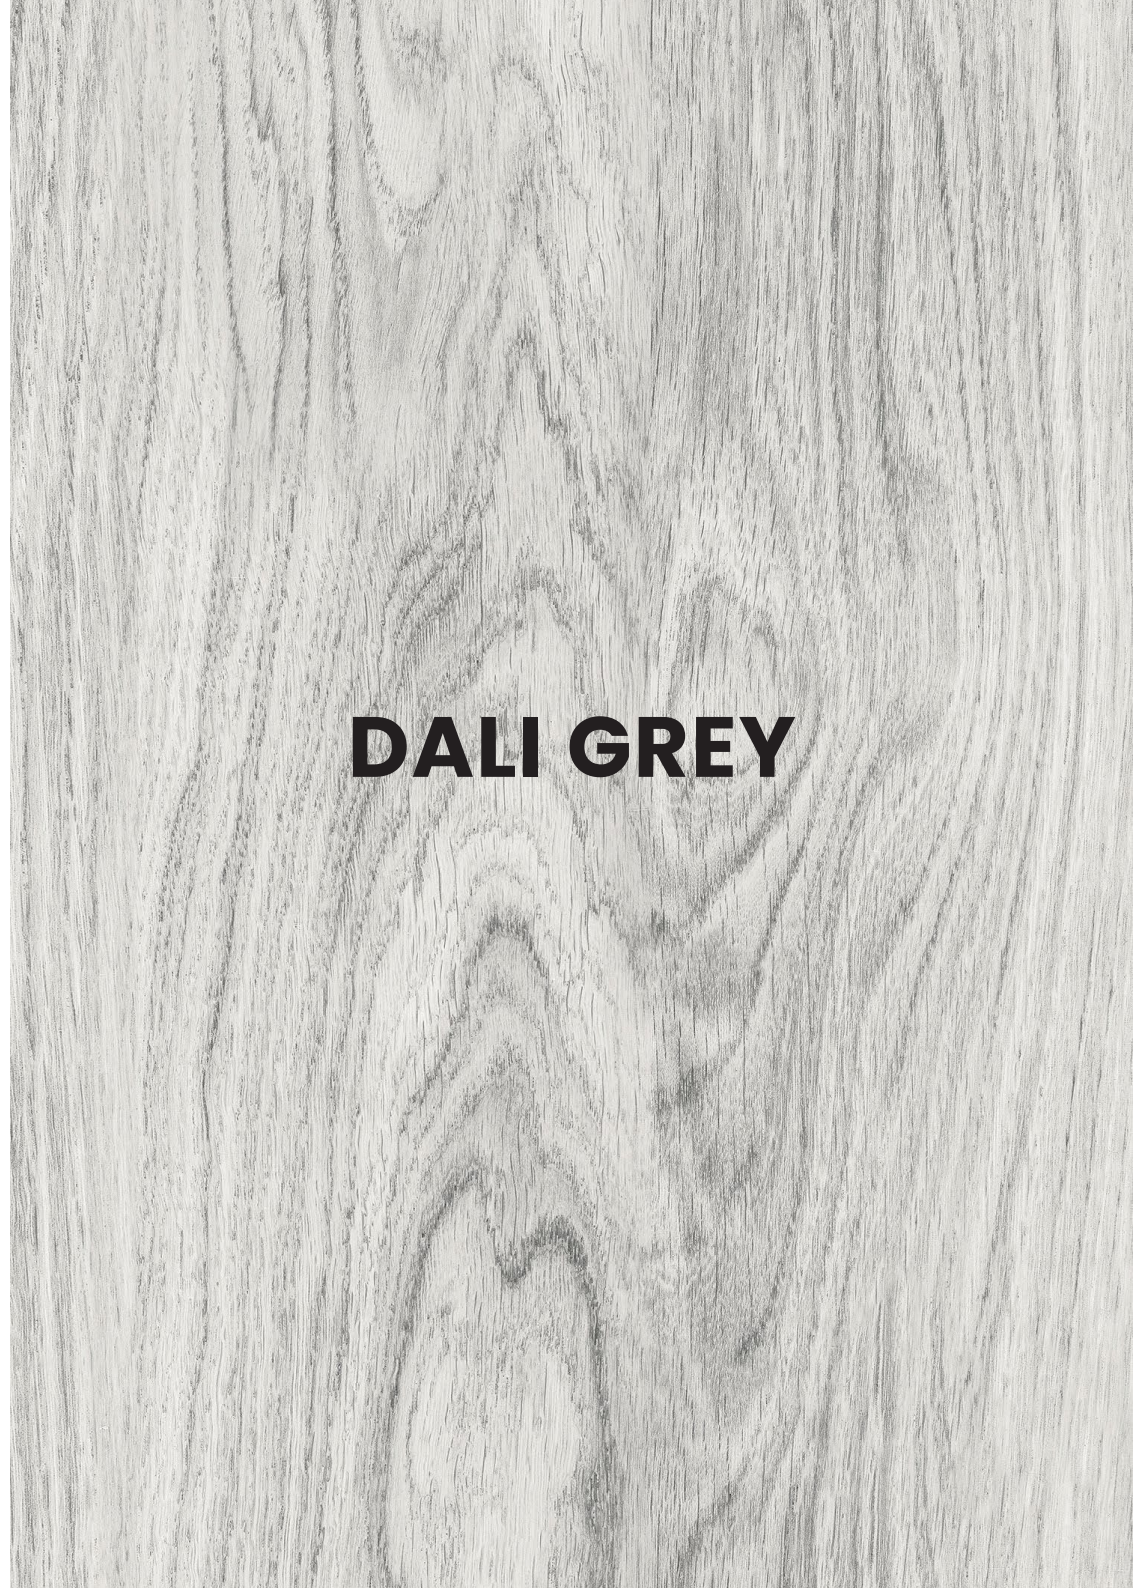

600x1200mm
Thickness: 9mm




DALI OAK

Glazed
Vitrified Tiles

DALI OAK



600x1200mm
Thickness: 9mm

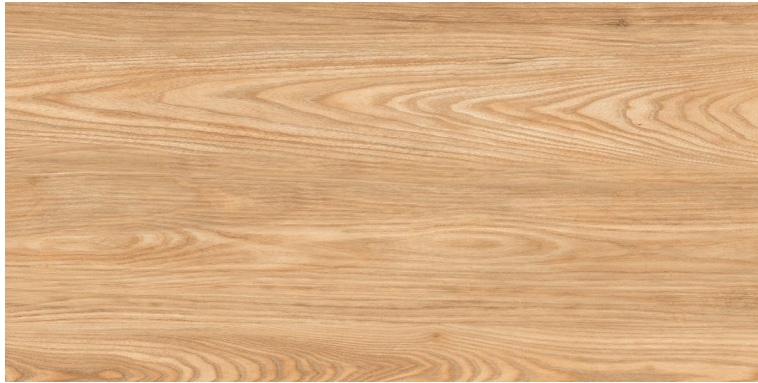

GOLDEN OAK WOOD

Glazed
Vitrified Tiles

**GOLDEN OAK
WOOD**





RANDOM DESIGN



ECO FRIENDLY



HIGH STRENGTH



LOW MAINTENANCE

600x1200mm
Thickness: 9mm



HARPER BURNT

Glazed
Vitrified Tiles

HARPER BURNT



600x1200mm
Thickness: 9mm



HARPER GREY

Glazed
Vitrified Tiles

HARPER GREY





RANDOM DESIGN



ECO FRIENDLY



HIGH STRENGTH



LOW MAINTENANCE


600x1200mm
Thickness: 9mm



HARPER NATURAL

Glazed
Vitrified Tiles

HARPER NATURAL

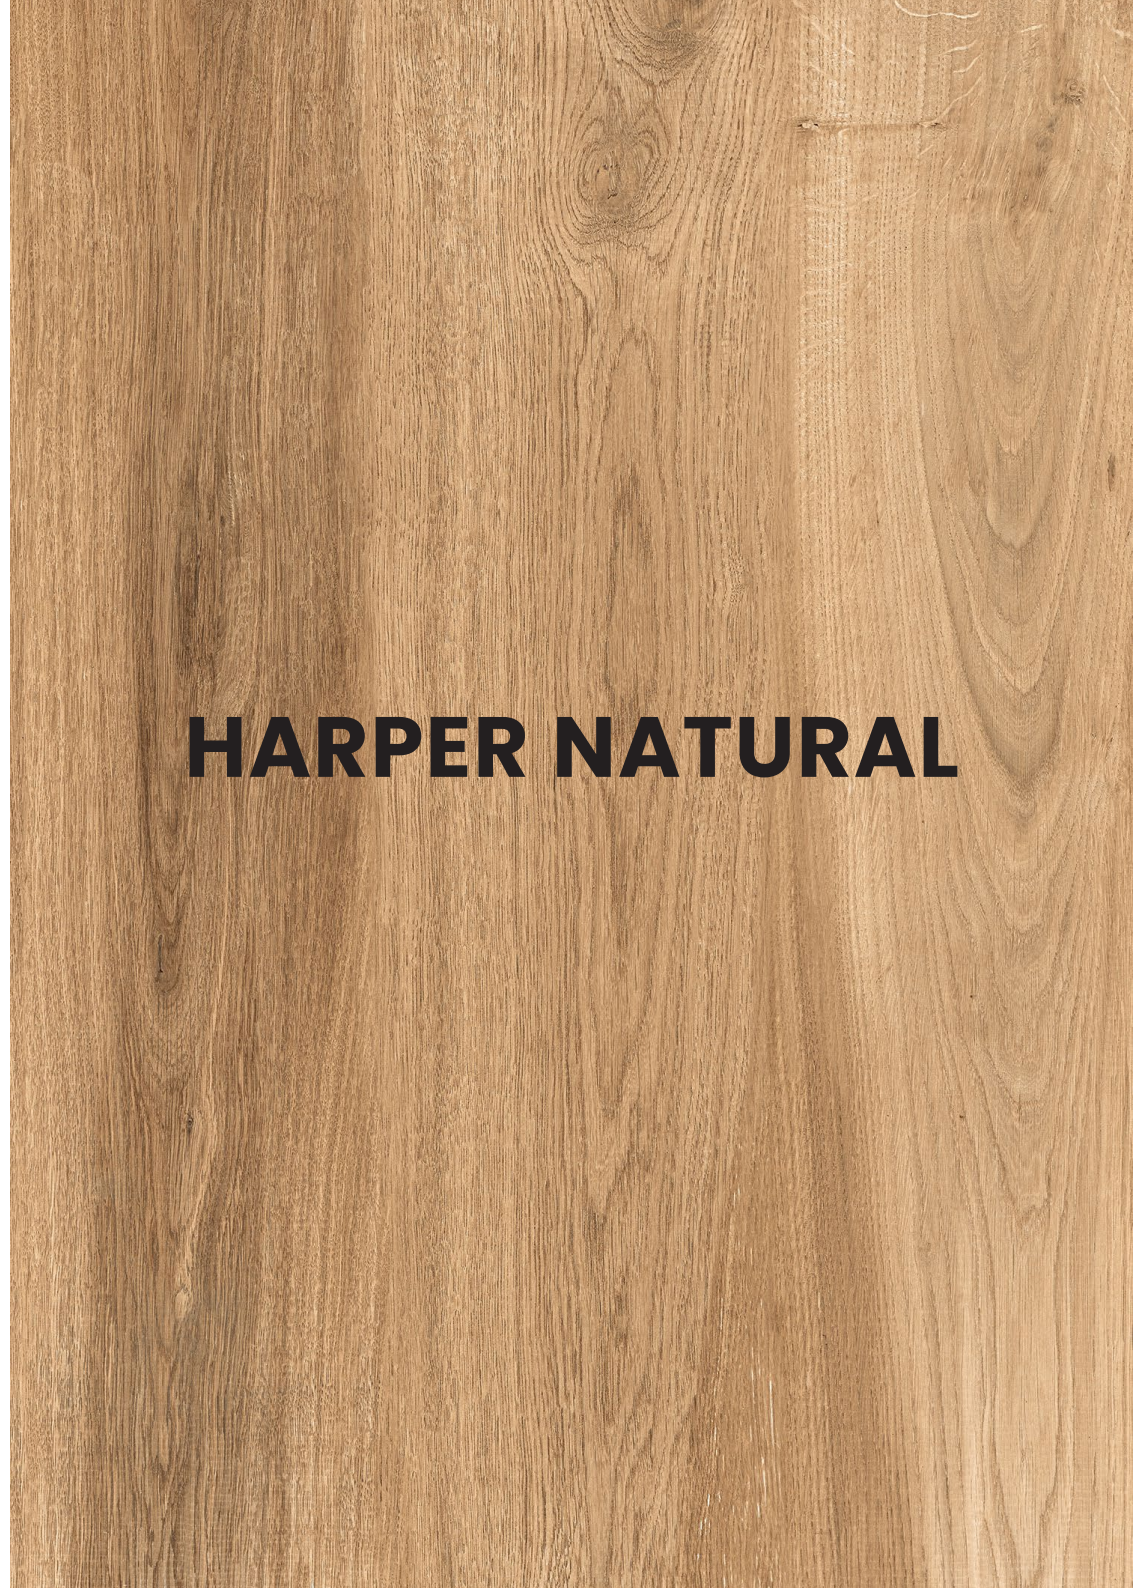

600x1200mm
Thickness: 9mm



HARPER ROSE GOLD

Glazed
Vitrified Tiles

**HARPER ROSE
GOLD**



600x1200mm
Thickness: 9mm



**IRISH COFFEE
WOOD**

Glazed
Vitrified Tiles

**IRISH COFFEE
WOOD**





RANDOM DESIGN



ECO FRIENDLY



HIGH STRENGTH



LOW MAINTENANCE

600x1200mm
Thickness: 9mm



**IRISH CREAM
WOOD**

Glazed
Vitrified Tiles

**IRISH CREAM
WOOD**



600x1200mm
Thickness: 9mm



IRISH TAN WOOD

Glazed
Vitrified Tiles

IRISH TAN WOOD



600x1200mm
Thickness: 9mm




LAKE WOOD CREAM

Glazed
Vitrified Tiles

**LAKE WOOD
CREAM**



600x1200mm
Thickness: 9mm

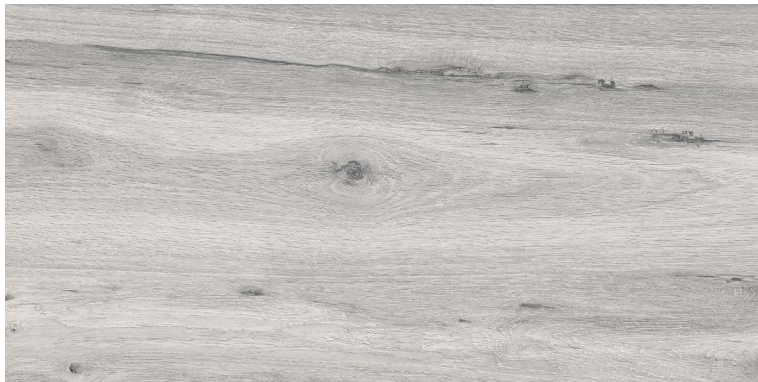

LAKE WOOD SILVER

Glazed
Vitrified Tiles

LAKE WOOD SILVER




600x1200mm
Thickness: 9mm



MAHOGANY DARK

Glazed
Vitrified Tiles

MAHOGANY DARK

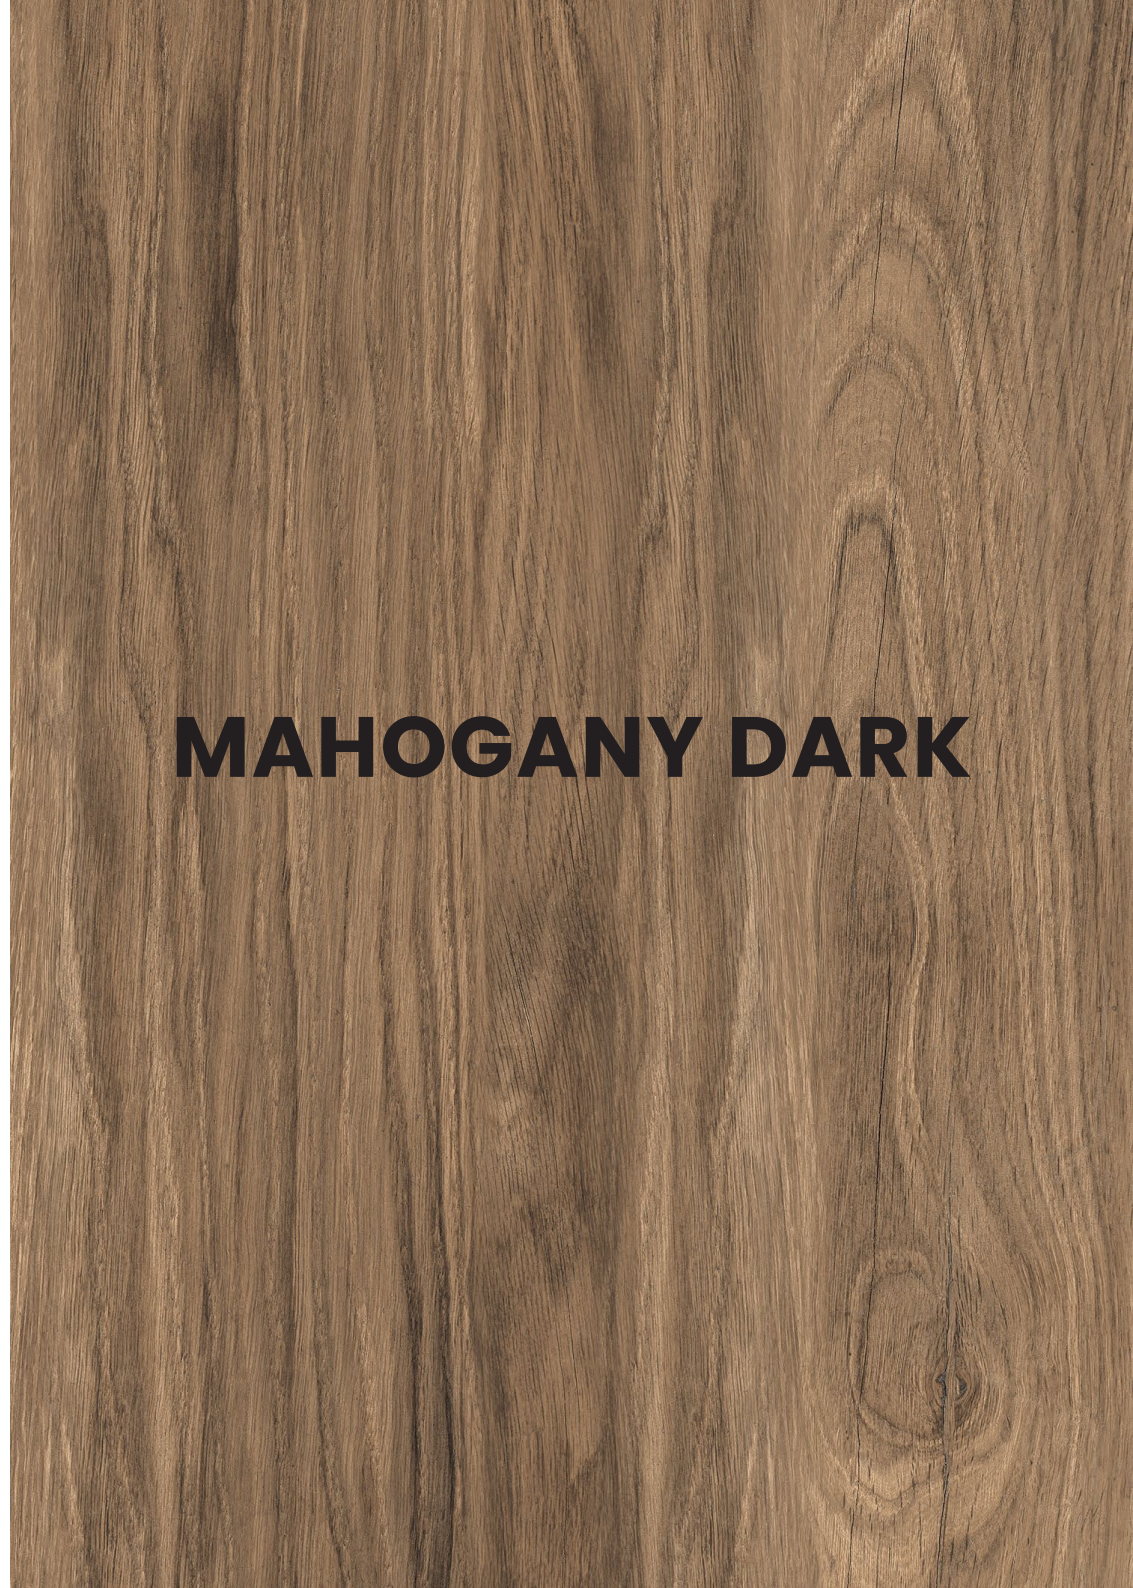


600x1200mm
Thickness: 9mm



MAHOGANY LIGHT

Glazed
Vitrified Tiles

MAHOGANY LIGHT

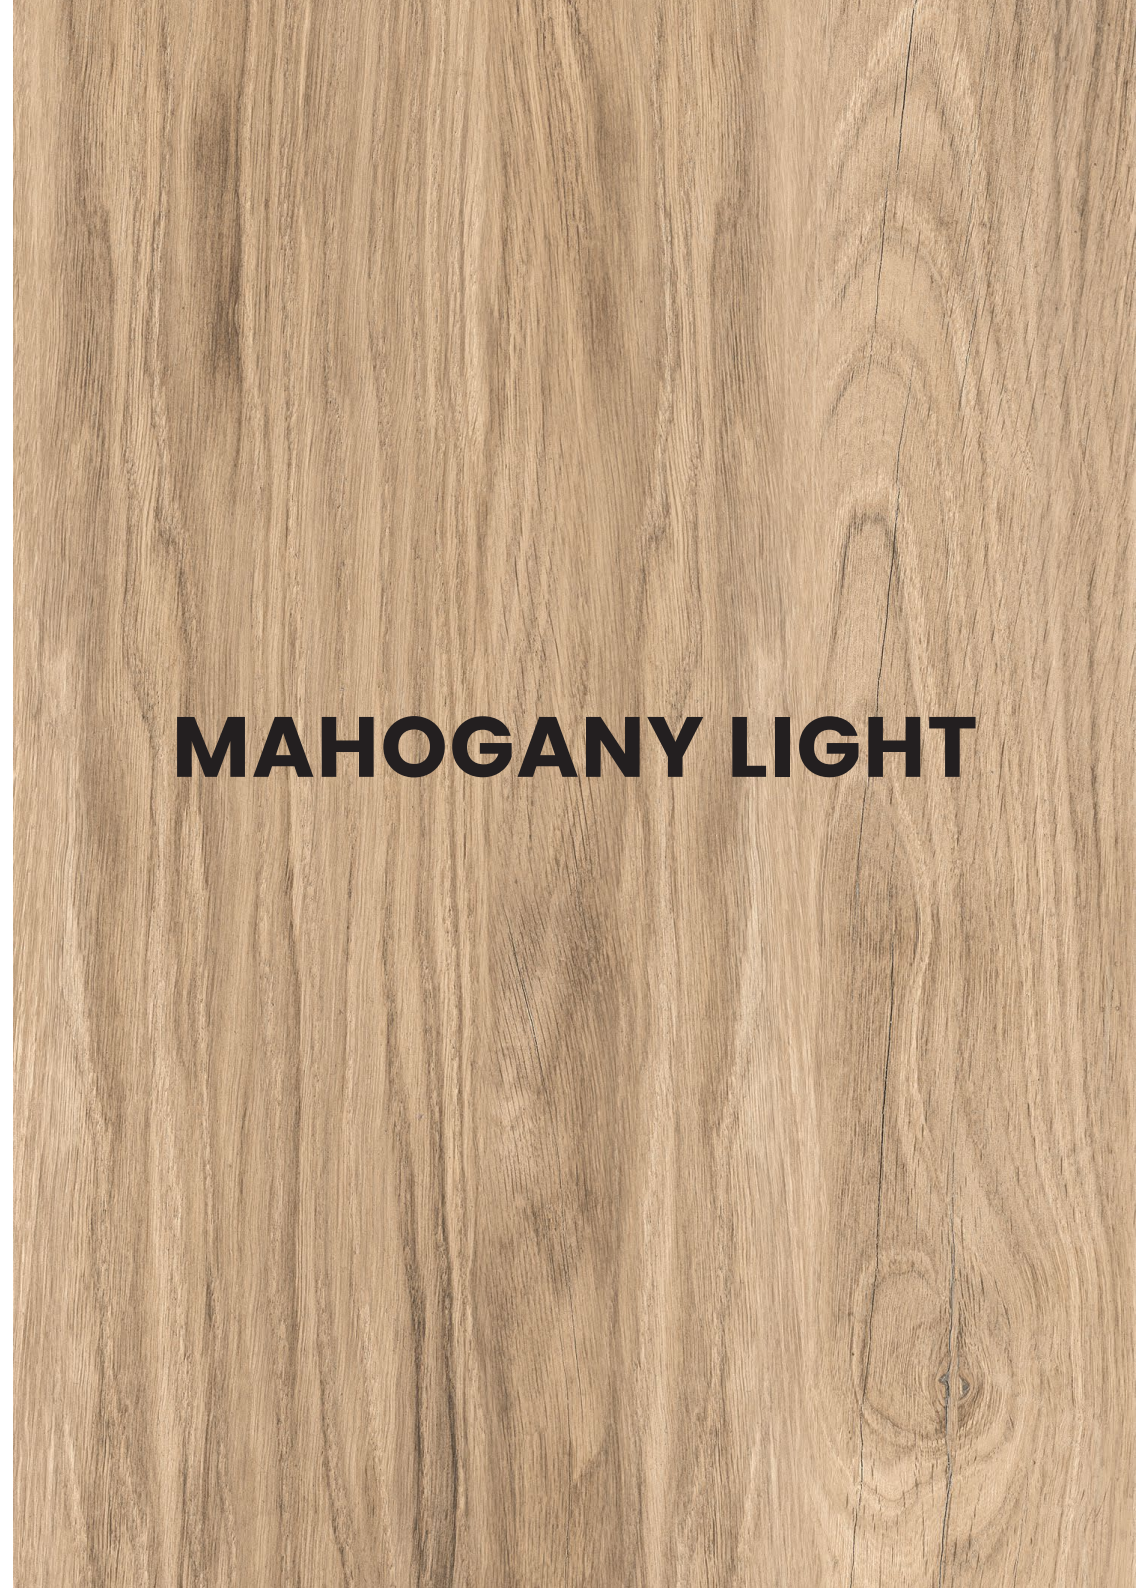



RANDOM DESIGN



ECO FRIENDLY




HIGH STRENGTH



LOW MAINTENANCE


600x1200mm
Thickness: 9mm

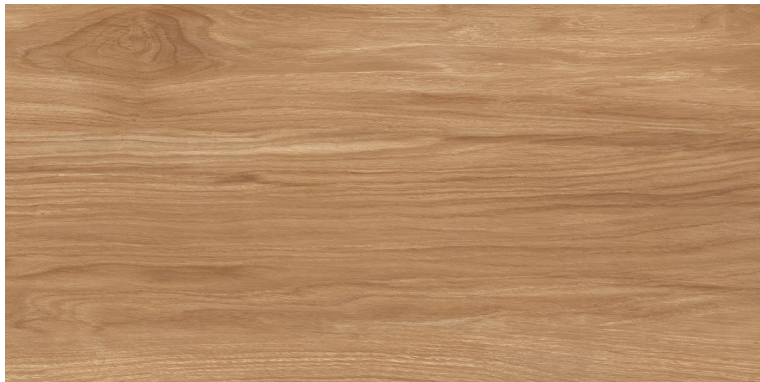

MAHOGANY TAN

Glazed
Vitrified Tiles

MAHOGANY TAN

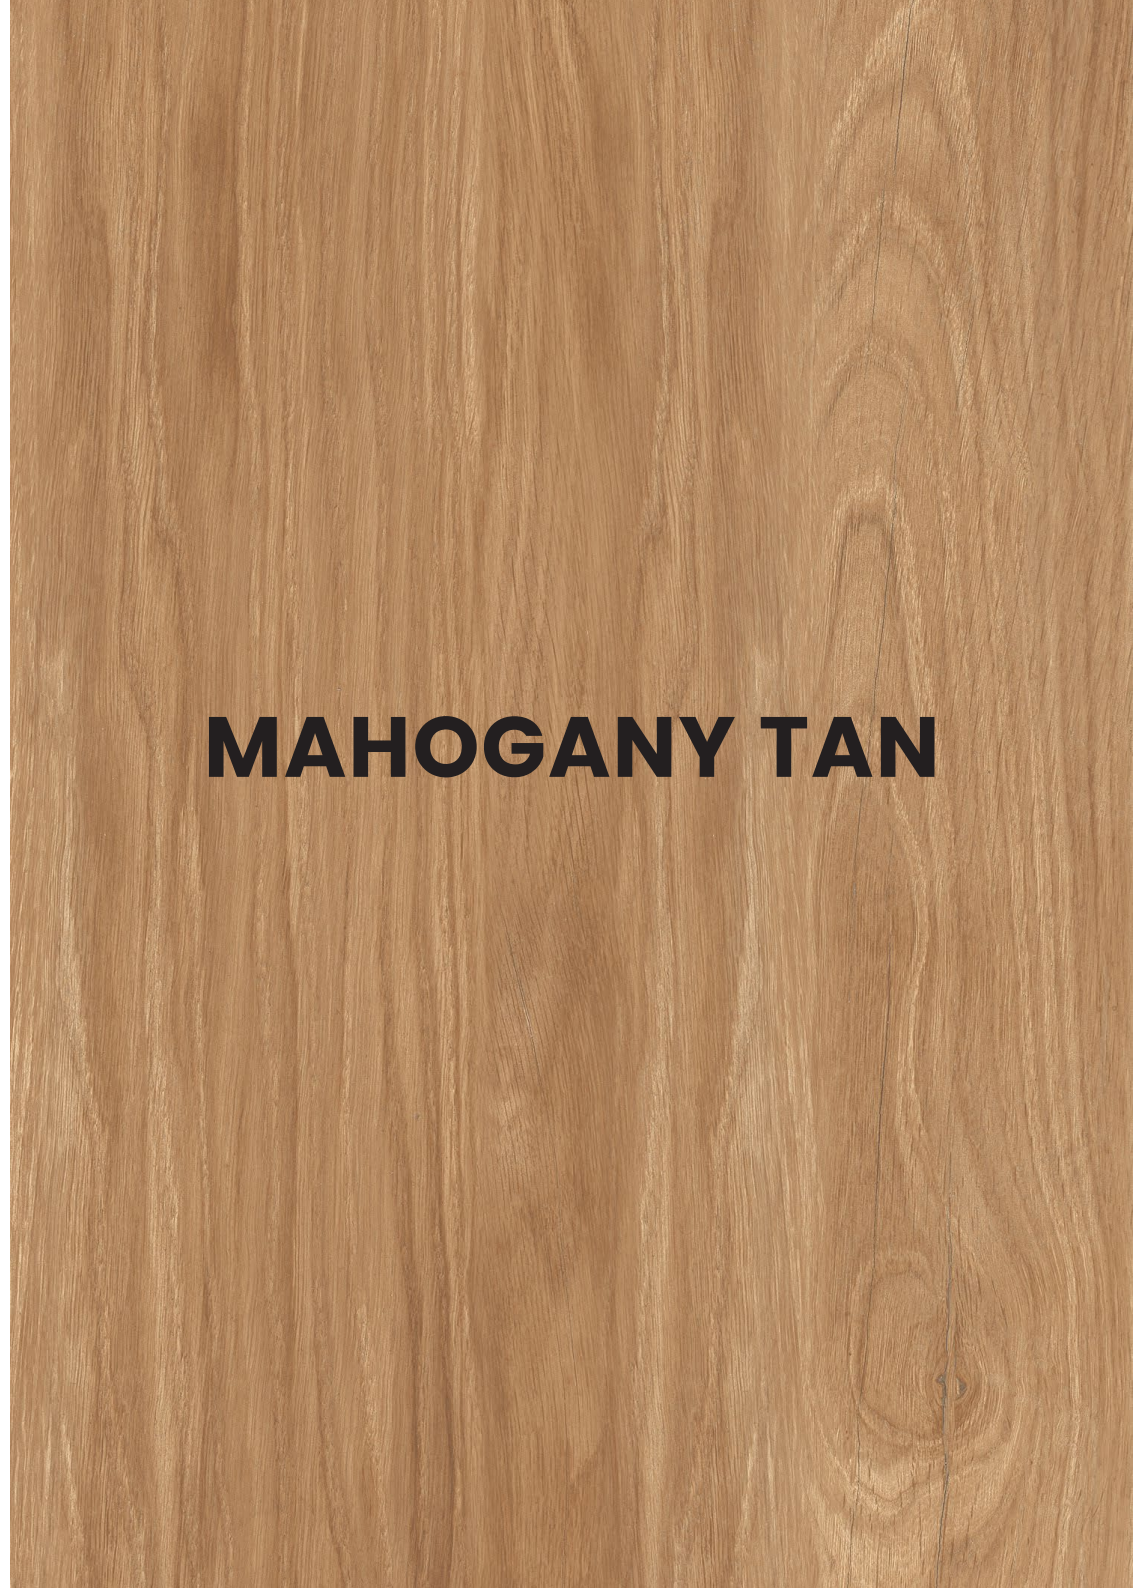


600x1200mm
Thickness: 9mm



MAPLE BEVER

Glazed
Vitrified Tiles

MAPLE BEVER

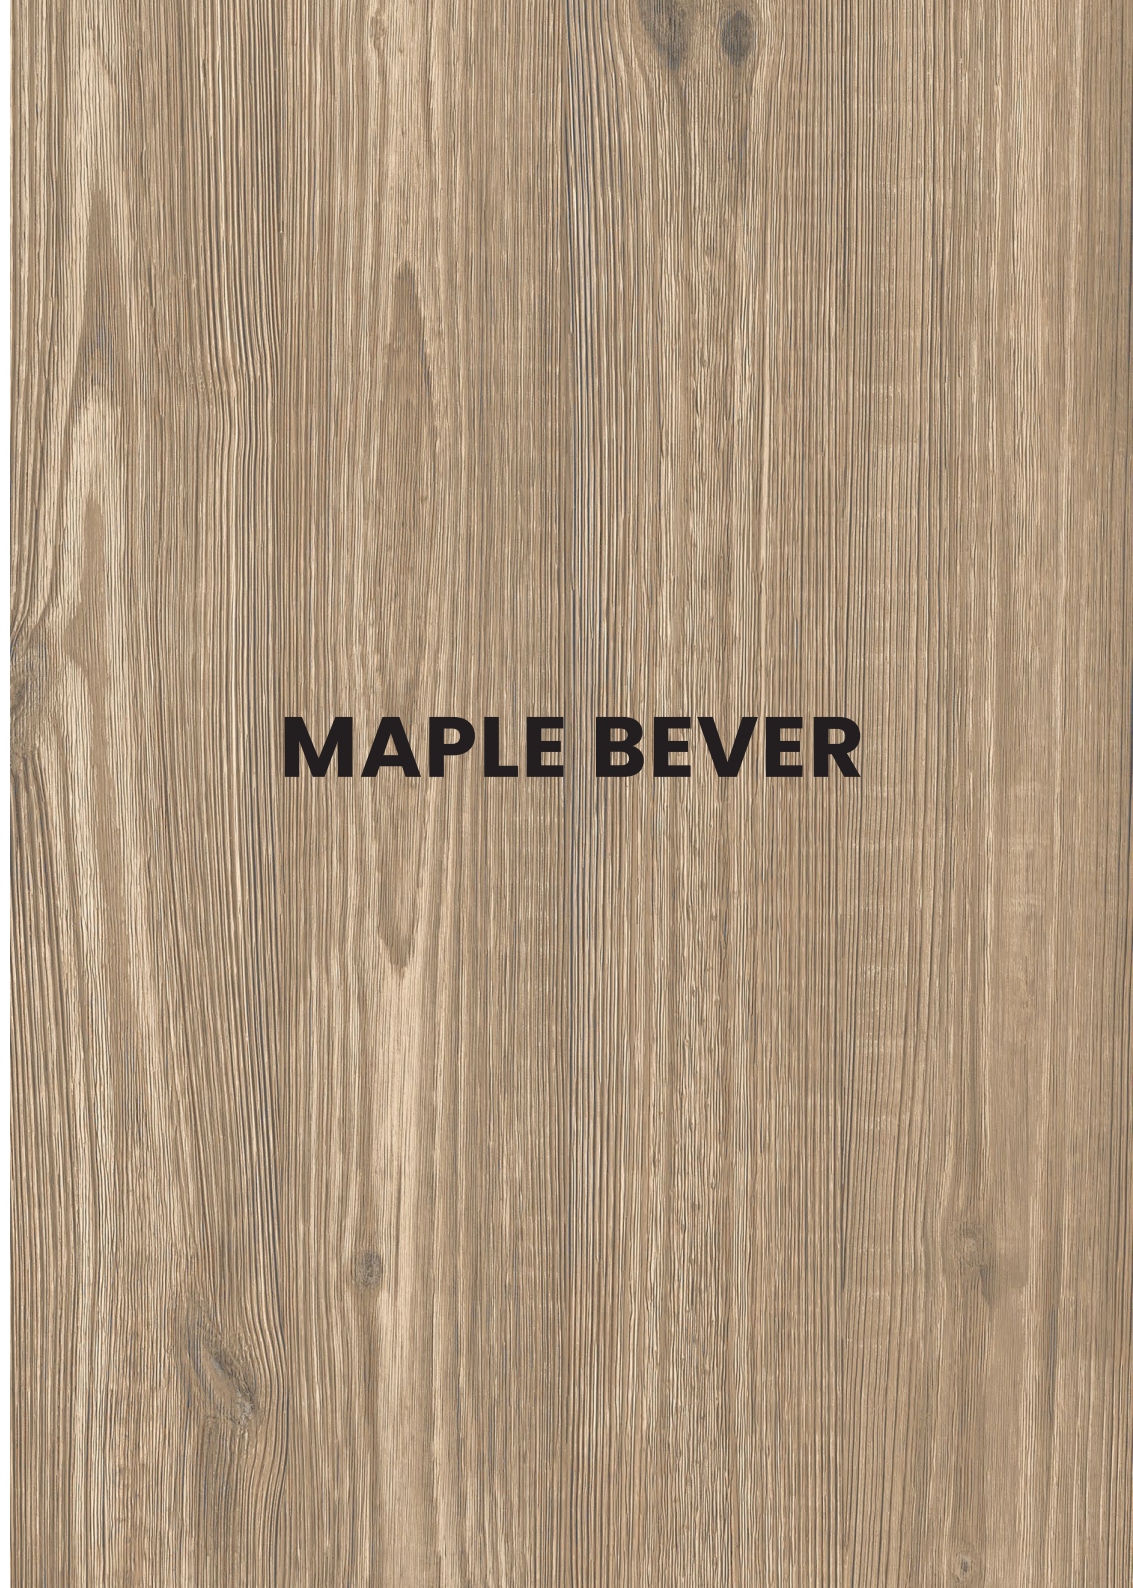

600x1200mm
Thickness: 9mm



MAPLE TAN

Glazed
Vitrified Tiles



MAPLE TAN


600x1200mm
Thickness: 9mm



MOLAVE WOOD

Glazed
Vitrified Tiles

MOLAVE WOOD

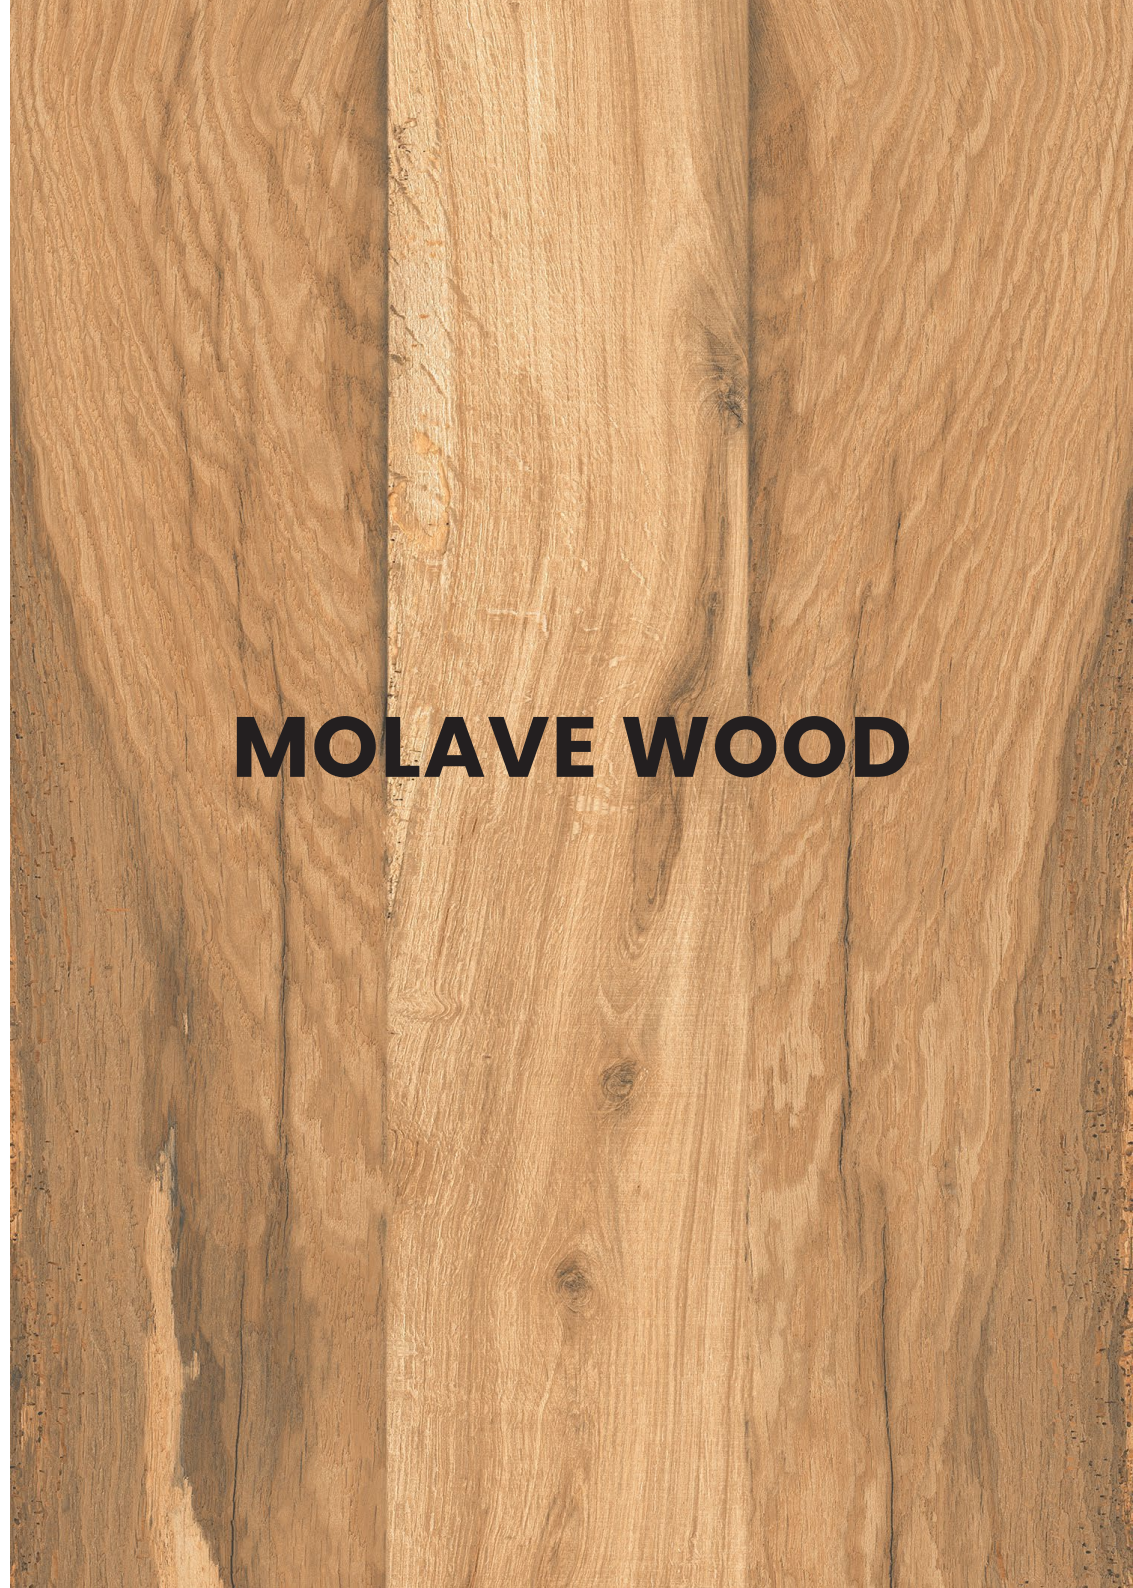



RANDOM DESIGN



ECO FRIENDLY



HIGH STRENGTH



LOW MAINTENANCE


600x1200mm
Thickness: 9mm



NARROW WOOD

Glazed
Vitrified Tiles

NARROW WOOD

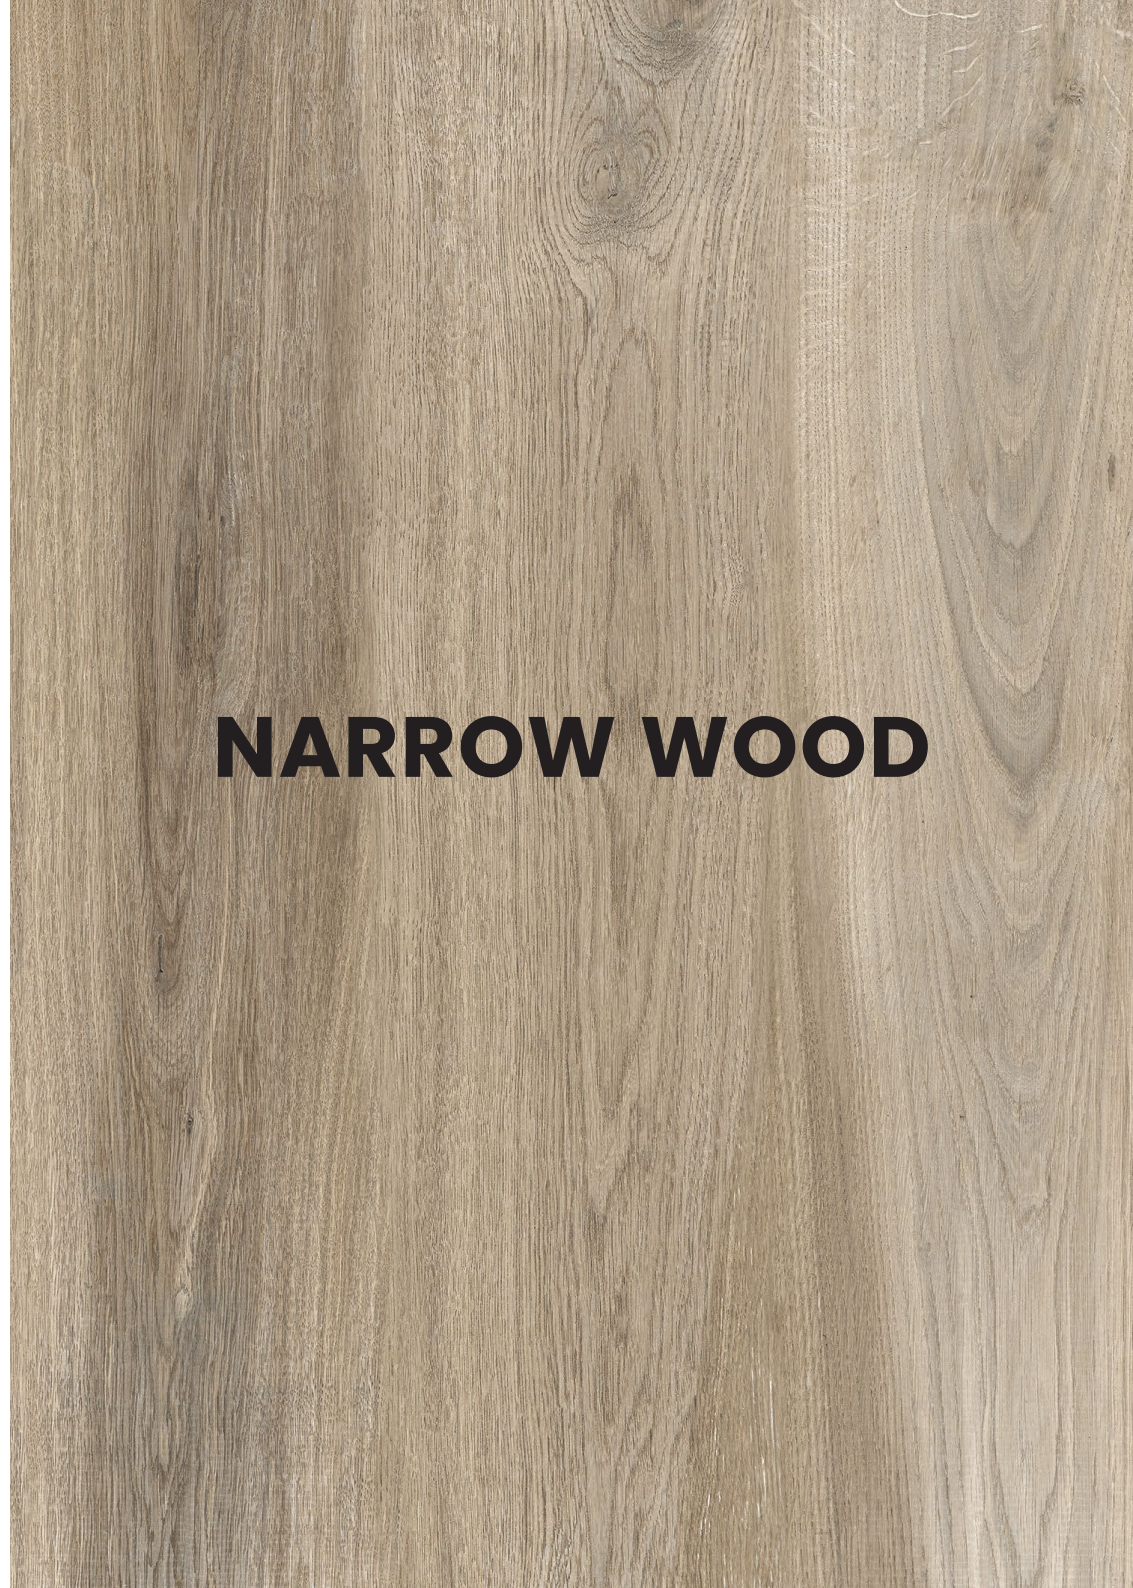


600x1200mm
Thickness: 9mm



NATURAL WOOD

Glazed
Vitrified Tiles

NATURAL WOOD

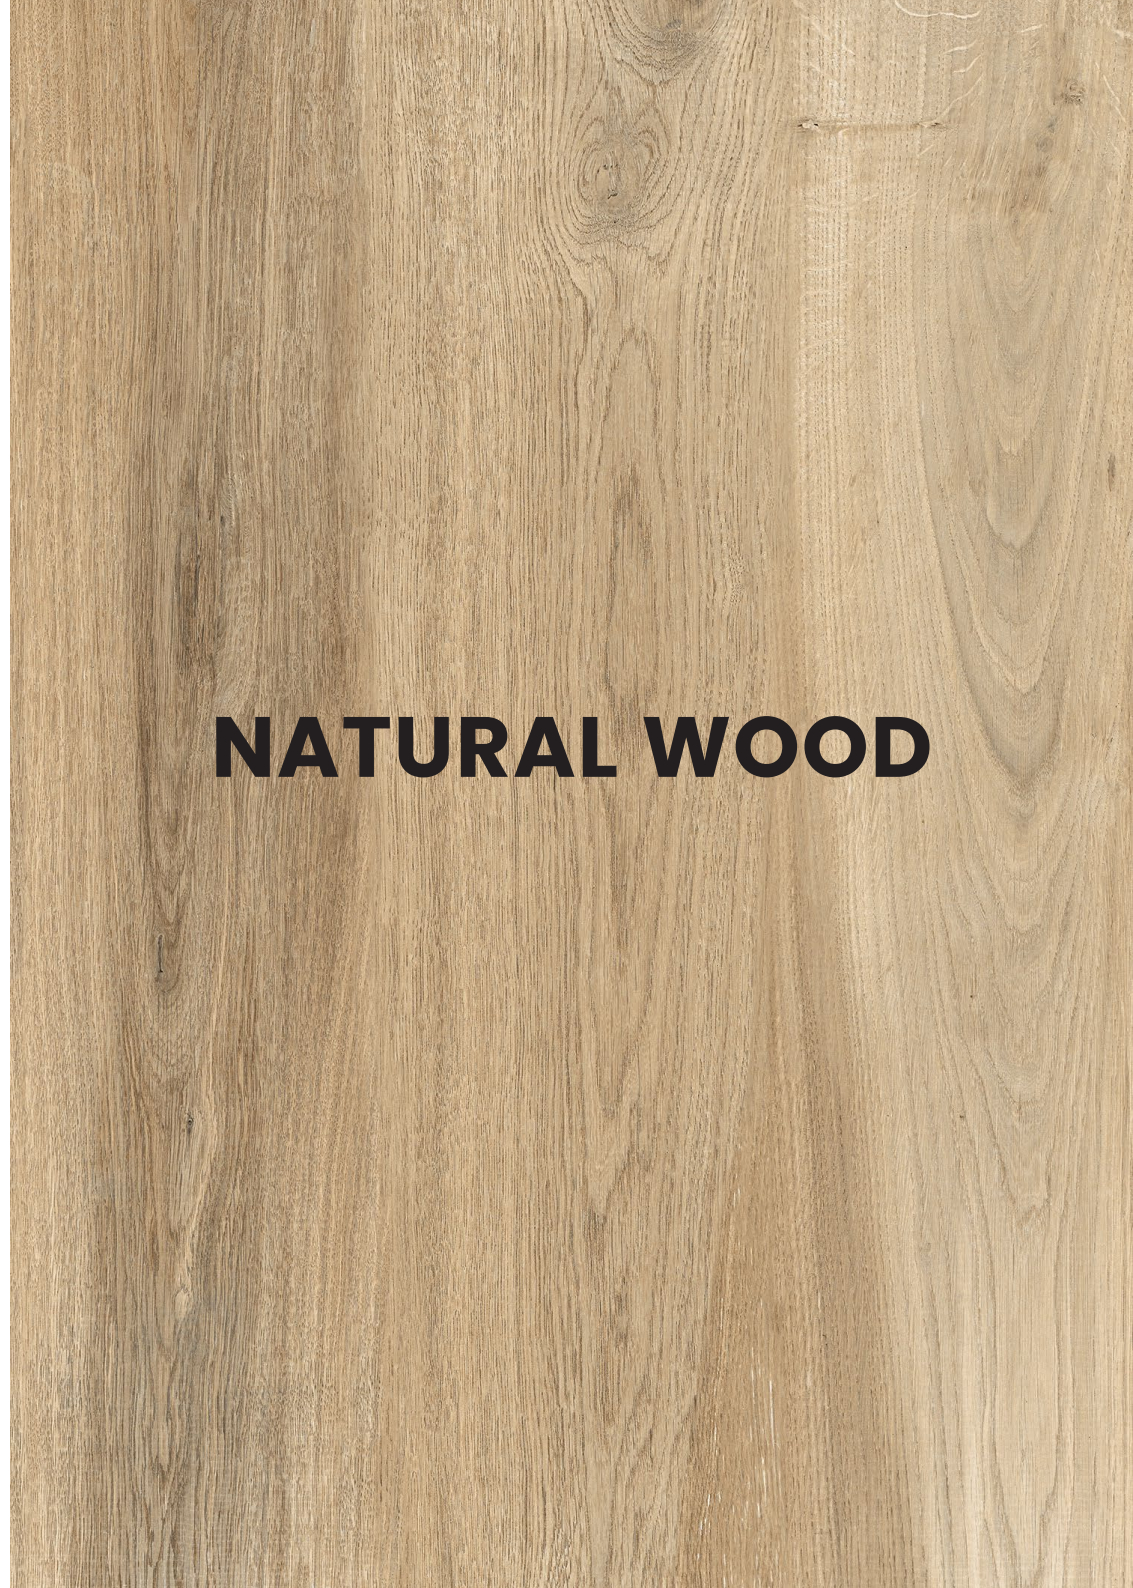



RANDOM DESIGN



ECO FRIENDLY



HIGH STRENGTH



LOW MAINTENANCE

600x1200mm
Thickness: 9mm



**OAK WOOD
BROWN**

Glazed
Vitrified Tiles

**OAK WOOD
BROWN**





RANDOM DESIGN



ECO FRIENDLY



HIGH STRENGTH



LOW MAINTENANCE

600x1200mm
Thickness: 9mm



PHOENIX WOOD

Glazed
Vitrified Tiles

PHOENIX WOOD





RANDOM DESIGN



ECO FRIENDLY



HIGH STRENGTH



LOW MAINTENANCE


600x1200mm
Thickness: 9mm



POPLAR WOOD

Glazed
Vitrified Tiles

POPLAR WOOD

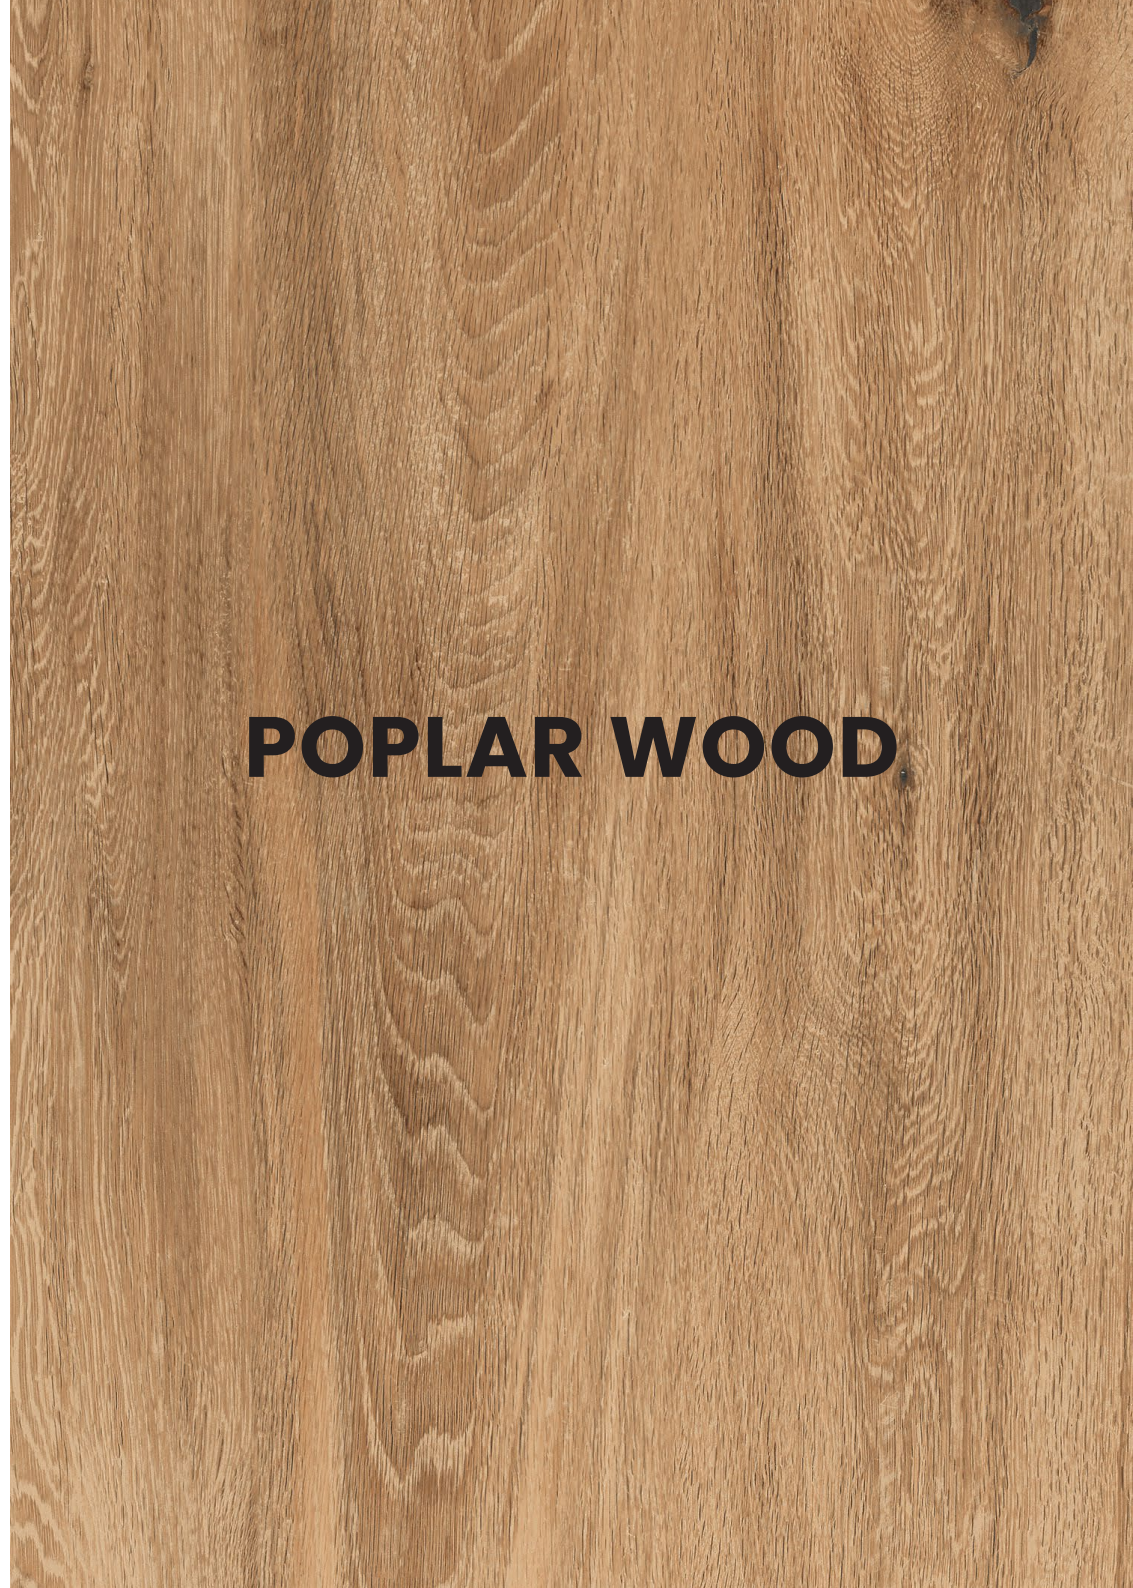



RANDOM DESIGN



ECO FRIENDLY



HIGH STRENGTH



LOW MAINTENANCE

600x1200mm
Thickness: 9mm



ROYAL DARK WOOD

Glazed
Vitrified Tiles

**ROYAL DARK
WOOD**



600x1200mm
Thickness: 9mm



ROYAL LITE WOOD

Glazed
Vitrified Tiles

ROYAL LITE WOOD



600x1200mm
Thickness: 9mm



**VINE WOOD
COFFEE**

Glazed
Vitrified Tiles

**VINE WOOD
COFFEE**



600x1200mm
Thickness: 9mm



**VINE WOOD
TAN**

Glazed
Vitrified Tiles

**VINE WOOD
TAN**




600x1200mm
Thickness: 9mm



VINTAGE AMBER

Glazed
Vitrified Tiles

VINTAGE AMBER

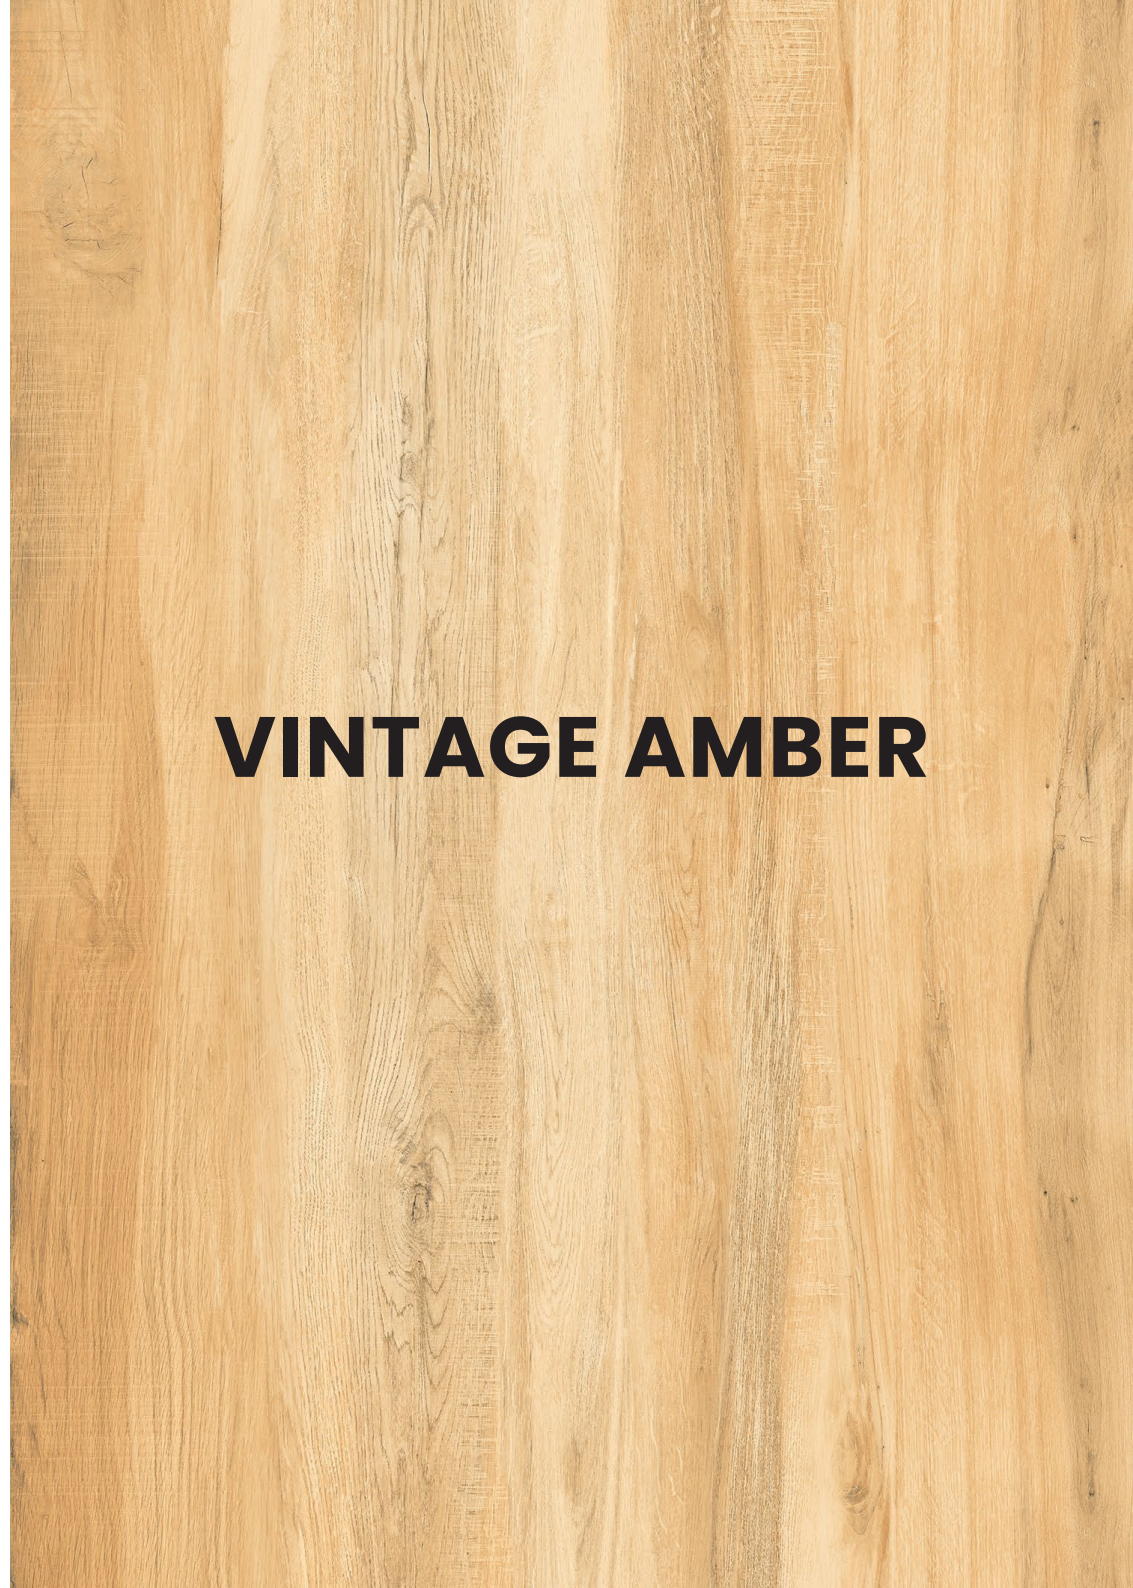

600x1200mm
Thickness: 9mm



VINTAGE BROWN

Glazed
Vitrified Tiles

VINTAGE BROWN





RANDOM DESIGN



ECO FRIENDLY



HIGH STRENGTH




LOW MAINTENANCE

600x1200mm
Thickness: 9mm



WALNUT WOOD

Glazed
Vitrified Tiles

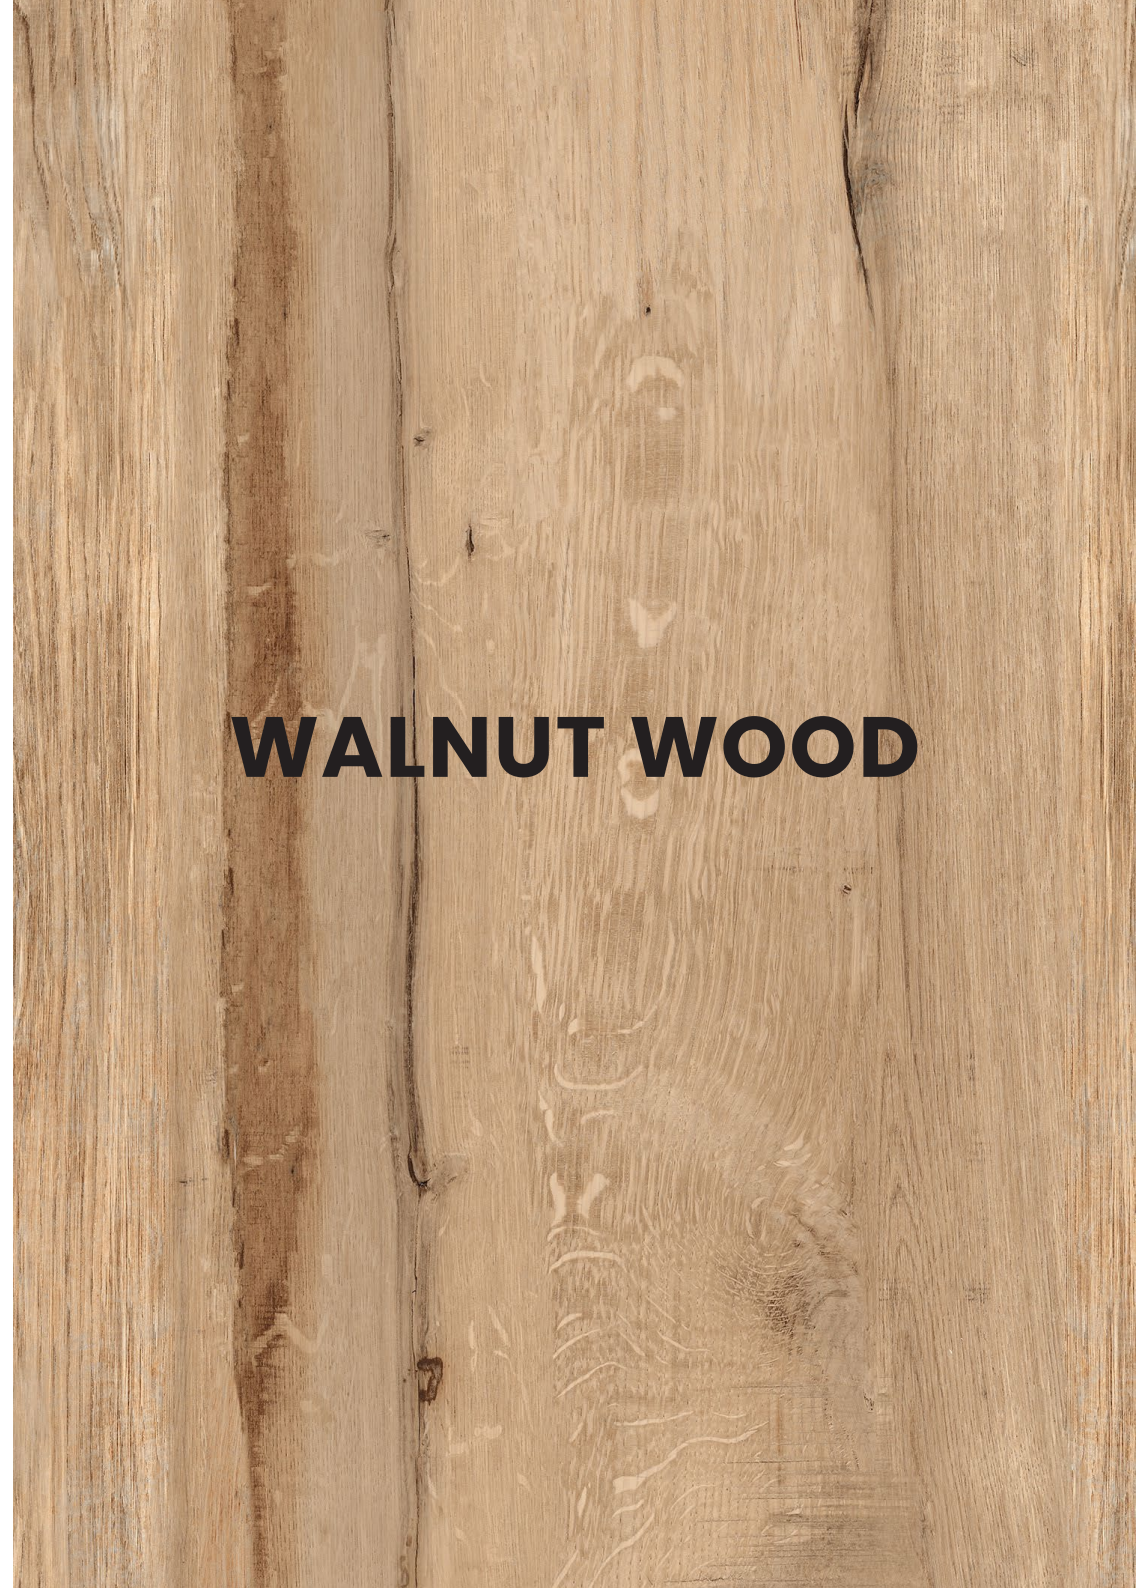

WALNUT WOOD



RANDOM DESIGN



ECO FRIENDLY



HIGH STRENGTH



LOW MAINTENANCE

600x1200mm
Thickness: 9mm




WEATHERED WOOD

Glazed
Vitrified Tiles

WEATHERED WOOD



600x1200mm
Thickness: 9mm

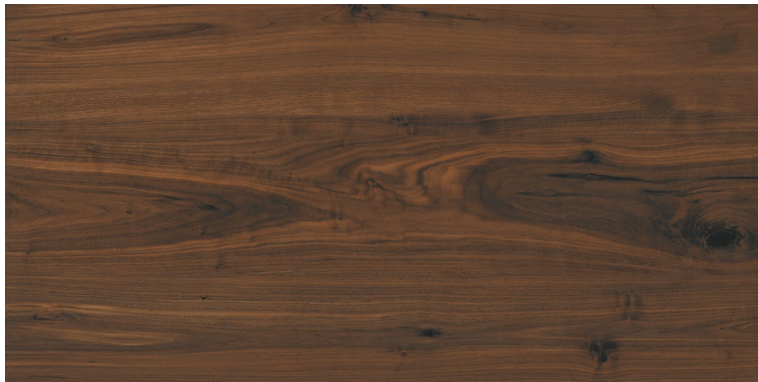

WOOD COGNAC

Glazed
Vitrified Tiles

WOOD COGNAC



RANDOM DESIGN



ECO FRIENDLY




HIGH STRENGTH



LOW MAINTENANCE


600x1200mm
Thickness: 9mm

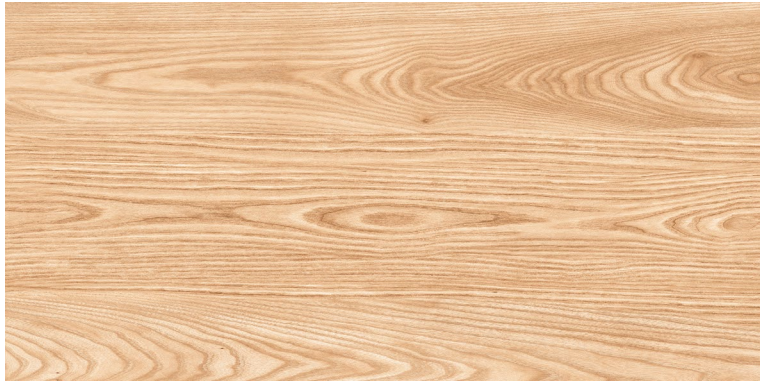

ZEBRA BOLD

Glazed
Vitrified Tiles

ZEBRA BOLD

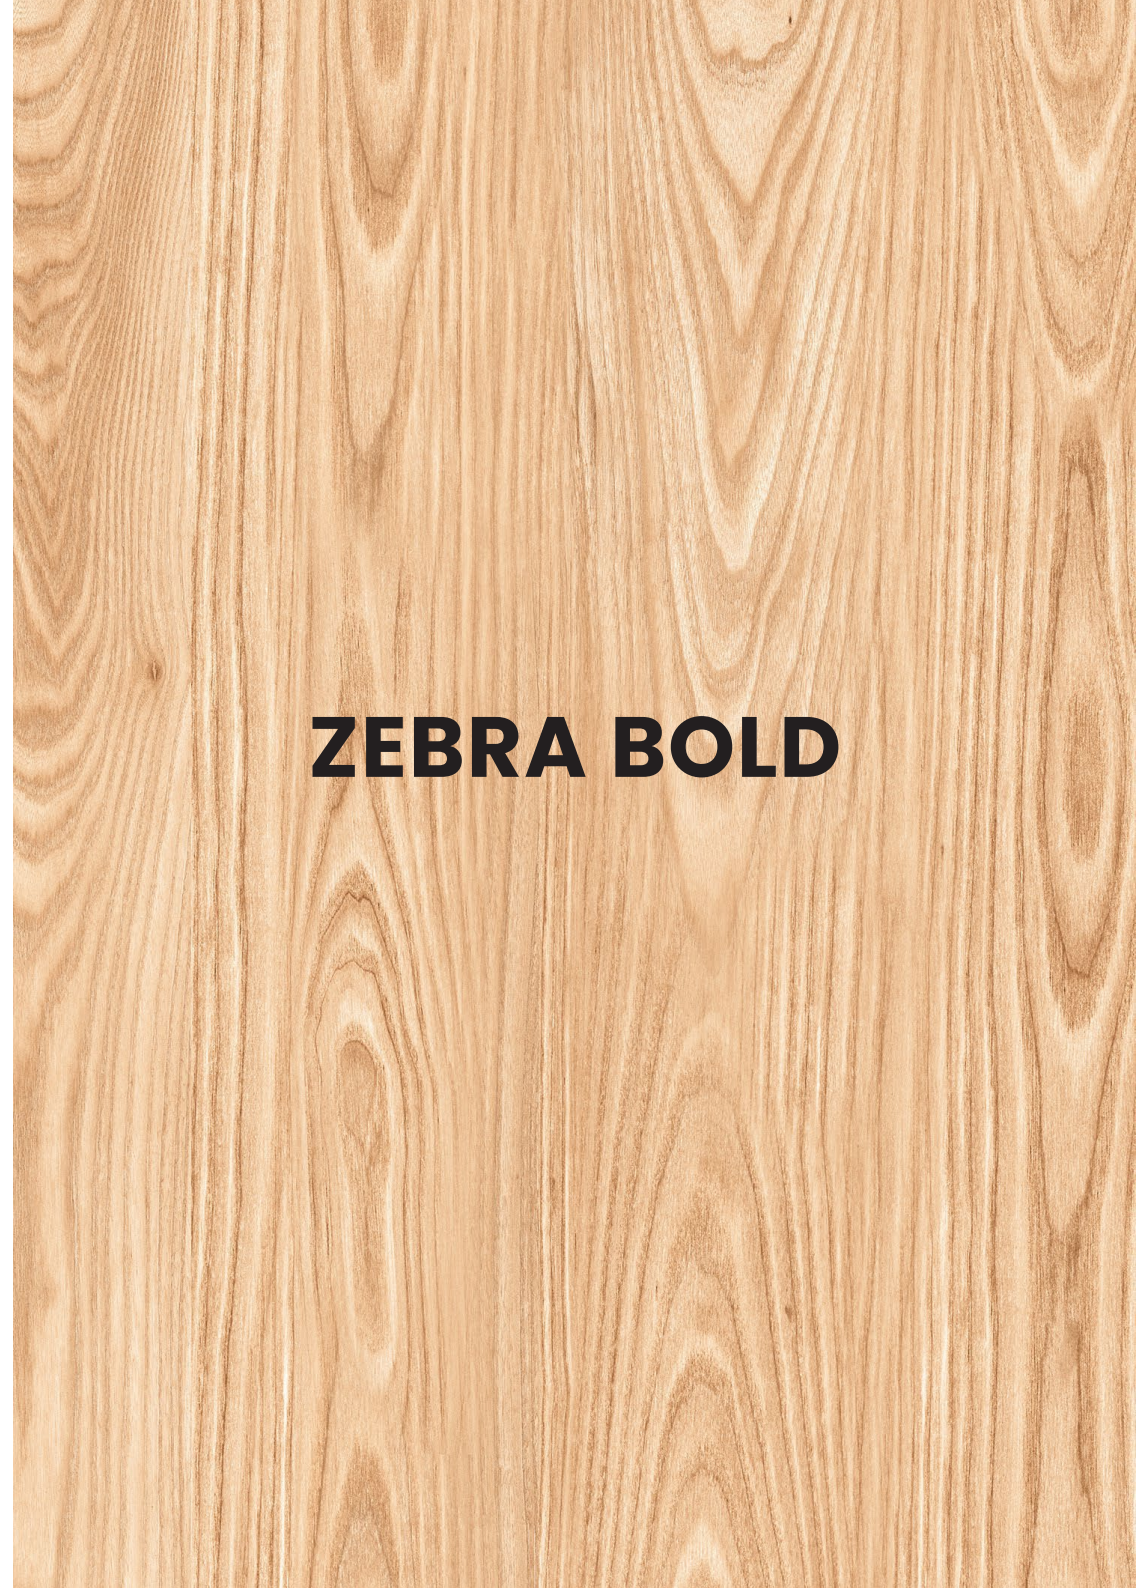


600x1200mm
Thickness: 9mm



ZEBRA BROWN

Glazed
Vitrified Tiles

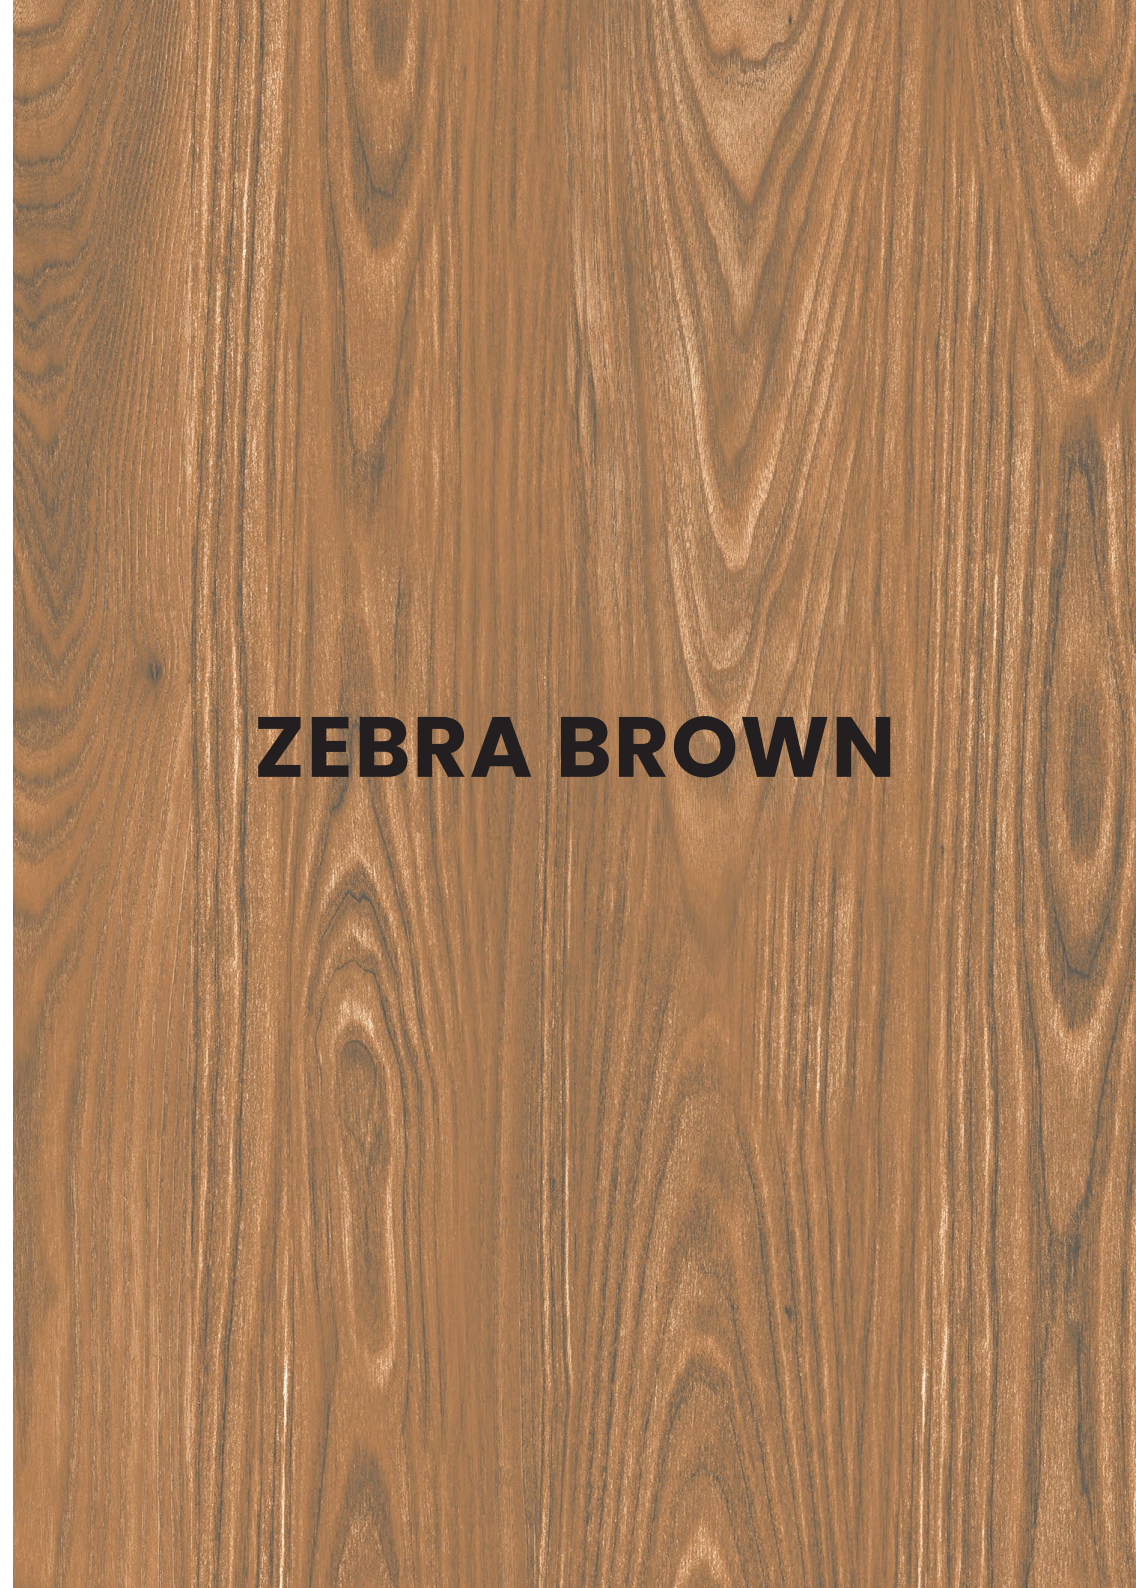


ZEBRA BROWN

600x1200mm
Thickness: 9mm



ZEBRA TAN

Glazed
Vitrified Tiles

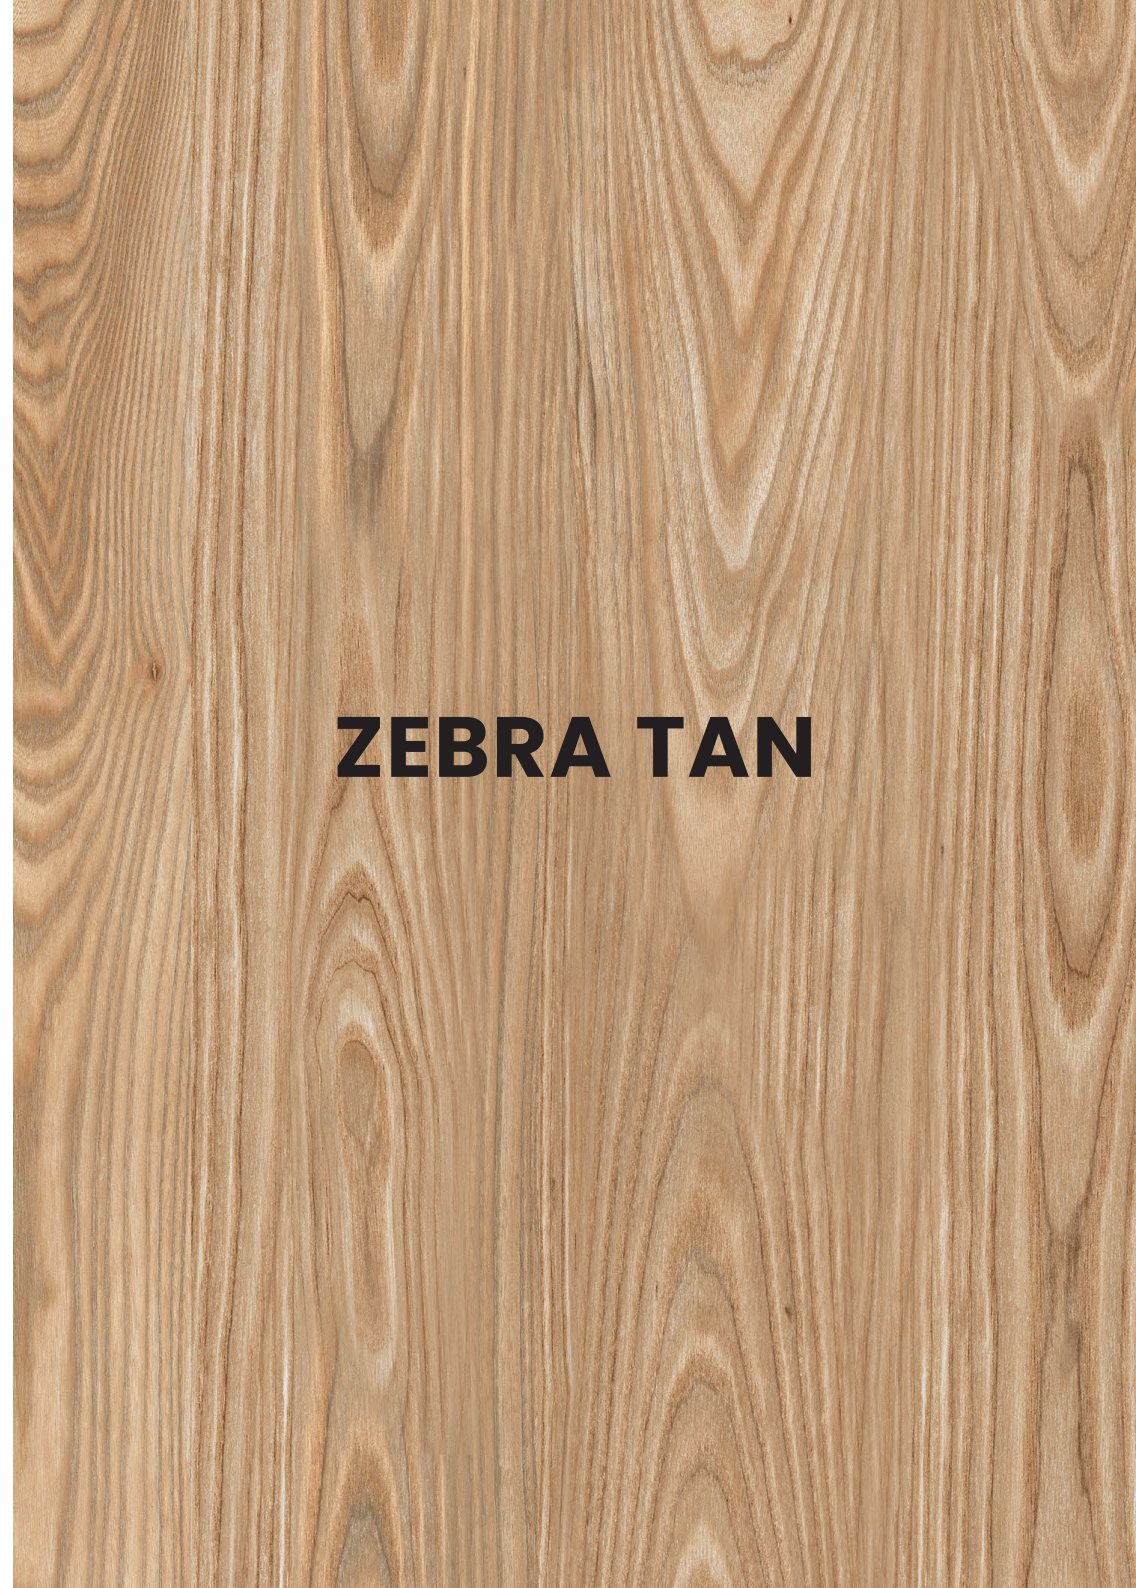

ZEBRA TAN


600x1200mm
Thickness: 9mm



ZEBRA WALNUT

Glazed
Vitrified Tiles

ZEBRA WALNUT

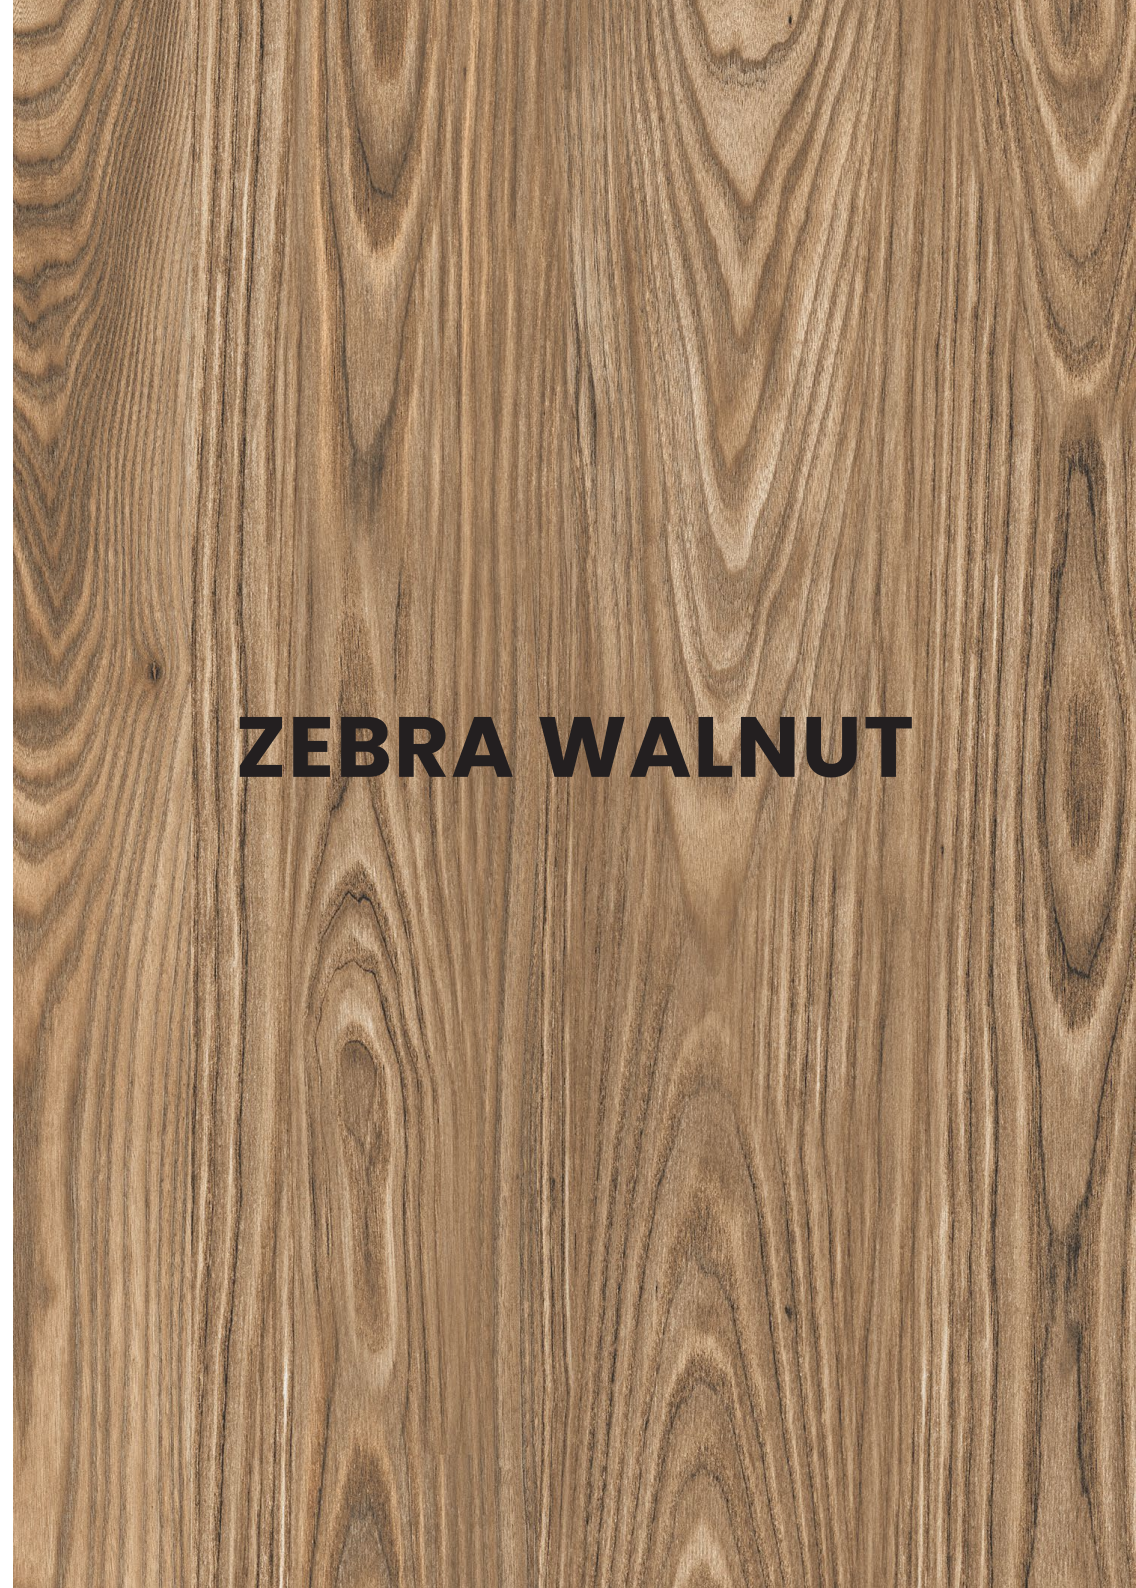


600x1200mm
Thickness: 9mm



ZEBRA WHITE

Glazed
Vitrified Tiles

ZEBRA WHITE

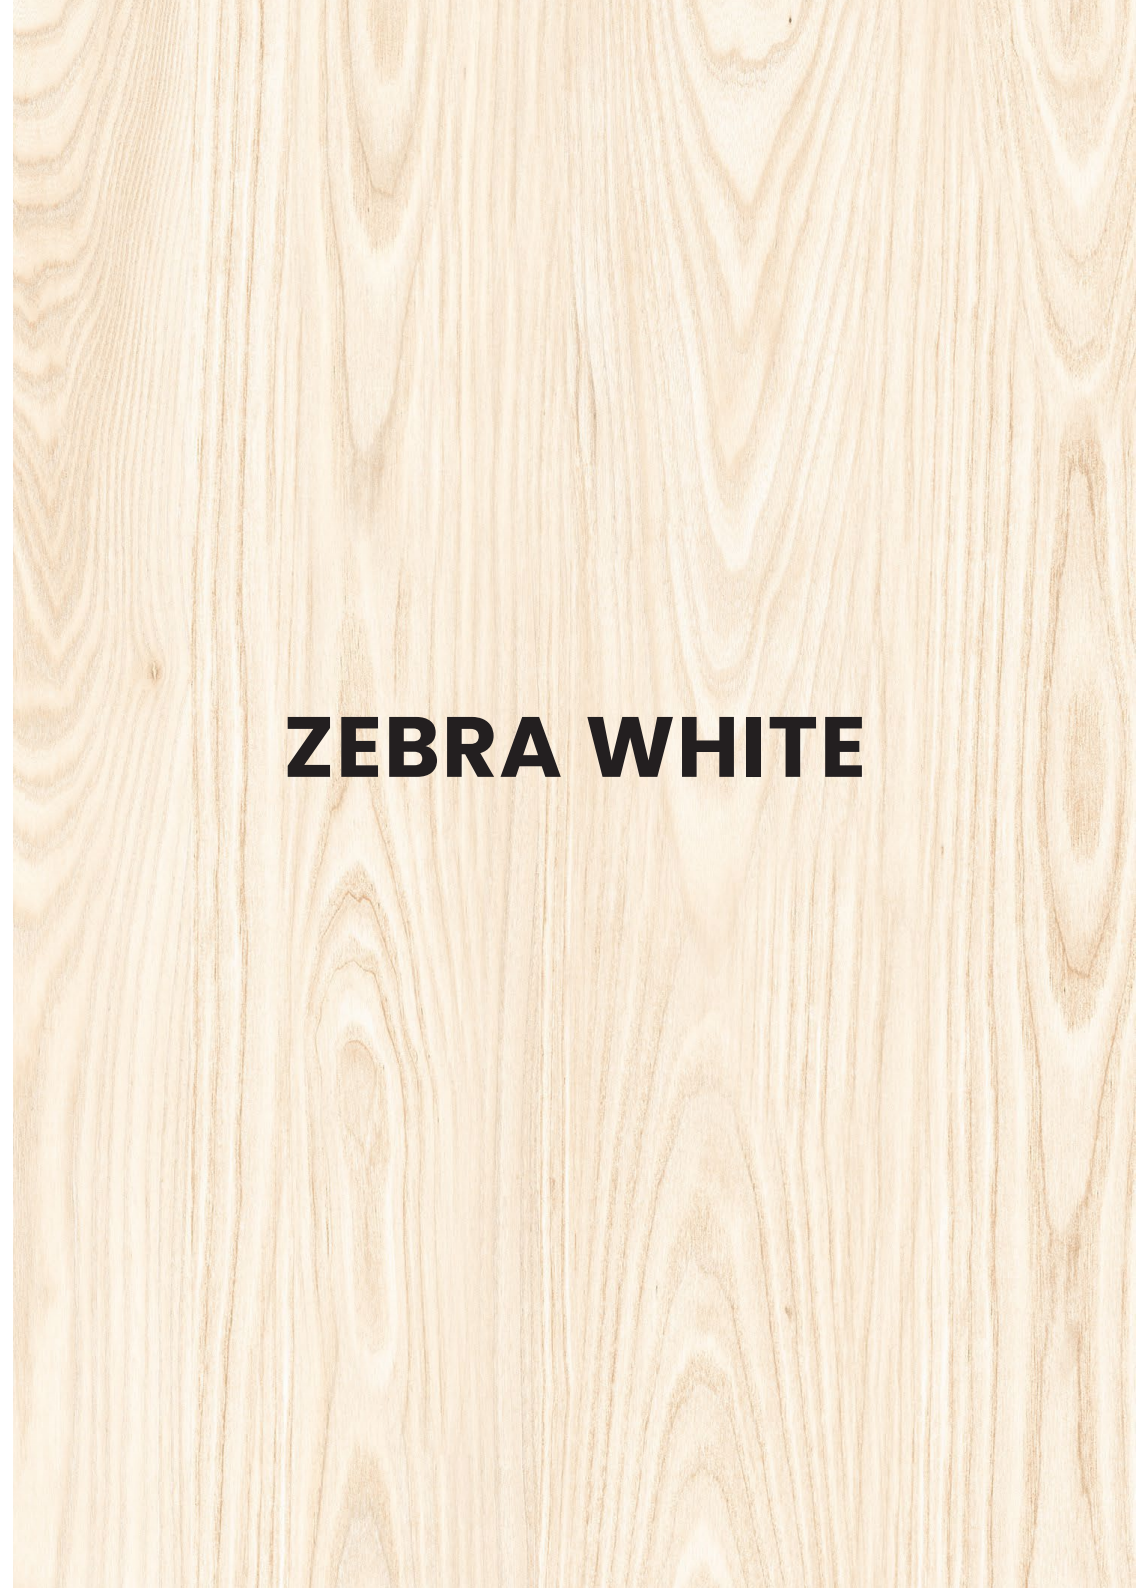

GVT/ PGVT SPECIFICATIONS

Test Description	Test Method	ISO 13006:2018 / EN 14411 Group B1a Requirement	Indian Standard IS 15622:2017 Group B1a Requirement	Value (Polished)	Value (Matt)
Length & Width	ISO 10545-2 / IS 13630-1	± 0.3% or ±1.0mm	± 0.1 %	± 0.1%	± 0.1%
Thickness	ISO 10545-2 / IS 13630-1	± 5% or ± 0.5mm	± 5 %	± 4%	± 4%
Straightness of Sides	ISO 10545-2 / IS 13630-1	± 0.3% or ±0.8mm	± 0.1 %	± 0.1%	± 0.1%
Rectangularity	ISO 10545-2 / IS 13630-1	± 0.3% or ± 1.5mm	± 0.1 %	± 0.1 %	± 0.1 %
Surface Flatness	ISO 10545-2 / IS 13630-1	± 0.4% or ±1.8mm	± 0.5 %	± 0.15%	± 0.15%
Surface Quality	ISO 10545-2 / IS 13630-1	Min 95% free from visible defects	Min 95% free from visible defects	>95% free from visible defects	>95% free from visible defects
Water Absorption	ISO 10545-3/ IS 13630- 2	≤ 0.5%, individual Max 0.6% .	Average ≤0.08%, Individual 0.1%, Max	≤ 0.05%	≤ 0.05%
Breaking Strength	ISO 10545-4 / IS 13630-6	700 N Min for thickness < 7.5 mm, 1300 Min for thickness ≥ 7.5 mm	700 N Min for thickness < 7.5 mm, 1300 Min for thickness ≥ 7.5 mm	≥ 1500 N	≥ 1500 N
Moisture Expansion	ISO 10545-10 / IS 13630-3	report value	0.02 mm/ m, Max	≤ 0.02 mm/ m	≤ 0.02 mm/ m
Modulus of Repture	ISO 10545-4/ IS 13630-6	≥ 35 N/mm ² , Individual 32 N/mm ² , Min	Average 35 N/mm ² , Individual 32 N/mm ² , Min	≥ 38 N/mm ²	≥ 38 N/mm ²
Resistance to Surface Abrasion	ISO 10545-7 / IS 13630-11	report abrasion class & Cycle passec	Class II, Min	PEI II - III	PEI III-V
Linear Thermal Expantion	ISO 10545-8/ IS 13630-4	report value	Max, 6x10 ⁻⁶ K ⁻¹	≤ 6x10 ⁻⁶ K ⁻¹	≤ 6x10 ⁻⁶ K ⁻¹
Thermal Stock Resistance	ISO 10545-9 / IS 13630 -5	report result	10 cycles Min	No Damage	No Damage
Frost Resistance	ISO 10545-12 / IS 13630-10	report result	required if requested by purchaser	No Damage	No Damage
Resistance to Chemicals	ISO 10545-13 / IS 13630-8	GB	AA min	GA/ AA	GA/ AA
Resistance to Stains	ISO 10545-14 / IS 13630-8	Min Class 3	Class I, Min	Class3(ISO) / Class1(BIS)	Class3(ISO) / Class1(BIS)
Color Resistance	ISO 10545-16	Report result	-	No change in color	No change in color
Color Resistance to UV Light	DIN 51094	Report result	-	No change in color	No change in color
Scratch Hardness (MOH's Scale)	IS 13630 -13	Not Required	5, Min	≥ 5	≥ 6

PACKING DETAILS

DIMENSION	PIECES	COVERAGE
600 X 1200 MM	2	1.44 sq. mtr.

DISCLAIMER : We tiles reserve the right to deleted and amend either totally or partially, any of the colors, shape, sizes, references and other technical specification contained in this catalogue at anytime. The colors shown of tiles in this catalogue are purely illustrative and limited to printing process. Please refer actual sample before final selection. The details of sizes, colors, references should be verified for typographical errors.

